


4-WAY TEE

Multi-directional Piping Solution



► SPECIFICATION

Material: UPVC
Size: DN15~DN25
Standard: DIN
Connection: SOCKET

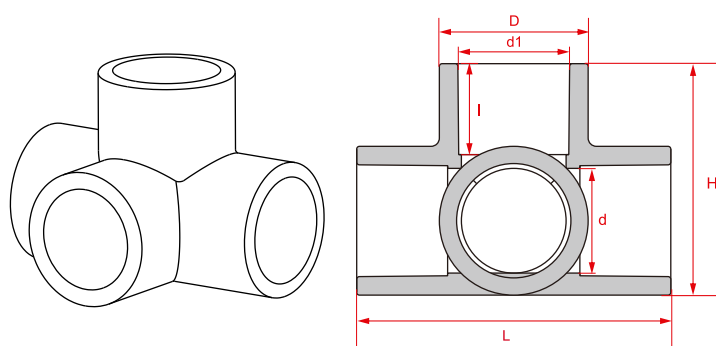

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE						PRESSURE
DN	d1	D	d	I	L	H	PN
DN15	20	27	19	16.5	57	42	16
DN20	25	33	24	19	68	50.5	16
DN25	32	40.5	30	22.5	81	60.75	16

VERSATILE CONNECTION POSSIBILITIES

- Multi-directional piping solutions ideal for versatile pipe installations in multi-port convergence and branching scenarios, providing efficient and stable solutions for compact equipment.

COMPLIANCE WITH INDUSTRIAL STANDARDS

- Strictly compliant with GB/T 4219.2-2015 industrial piping standards, designed for 16 Bar pressure ratings.

HIGH-POLISH INNER WALLS

- Features high-polish technology on both outer surfaces and inner bores to effectively reduce chemical deposition, ensuring superior and stable performance.

STRICT QUALITY MANAGEMENT SYSTEM

- Adheres strictly to the ISO 9001:2015 quality management system, ensuring effective control over the production process to maintain consistent product quality. Following the Flowcolour® philosophy of "FLOW CREATES VALUE" ensuring excellent cost-effectiveness of the products.