



## UV Sterilizer (Aegis Mini)

### SIZE: DN25


MATERIAL: **UPVC, ASA**

STANDARD: **DIN**

COLOUR: **Gray, White**

CONNECTION: **Socket**

POWER: **10W, 15W, 20W**

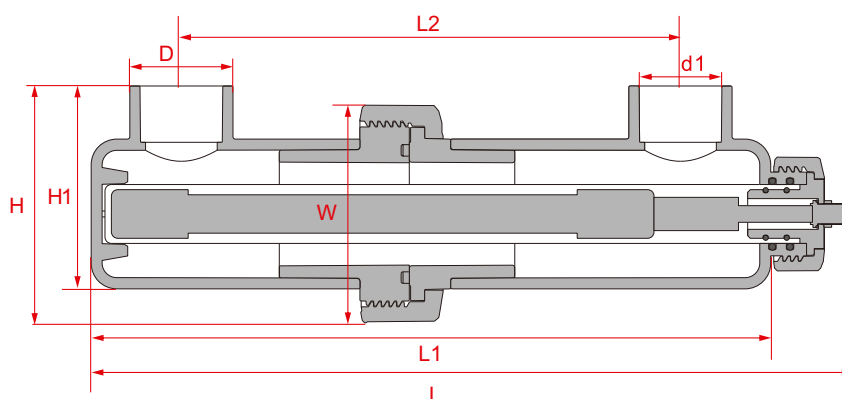

| TECHNICAL PARAMETER  |                                                                                               |                           |               | WATTS | SEAWATER          | FRESHWATER          |
|----------------------|-----------------------------------------------------------------------------------------------|---------------------------|---------------|-------|-------------------|---------------------|
| Product Dimensions : | 298*85*93mm                                                                                   | Inlet/Outlet Connection : | DN25          | 10W   | < 250L 100-300L/h | < 500L 100-500L/h   |
| Rated Voltage :      | 220V-240V 50/60Hz                                                                             | Estimated Lamp Lifetime : | ≥5000Hours    | 15W   | < 350L 200-600L/h | < 750L 300-800L/h   |
| Wire Length :        | ≥1.5m                                                                                         | Ingress Protection :      | IP68 ( body ) | 20W   | < 500L 300-800L/h | < 1000L 400-1000L/h |
| UV Intensity :       | ≥24μw/cm <sup>2</sup> ( 10W ) / ≥50μw/cm <sup>2</sup> ( 15W ) / ≥61μw/cm <sup>2</sup> ( 20W ) |                           |               |       |                   |                     |

Unit:mm

| NOMINAL SIZE | STRUCTURE SIZE |      |    |     |       |     |    |    |    | PRESSURE | APPROX. WT. | PRODUCT CODE    |
|--------------|----------------|------|----|-----|-------|-----|----|----|----|----------|-------------|-----------------|
| DN           | d1             | D    | I  | L   | L1    | L2  | H  | H1 | W  | PN       | g           | 20W             |
| DN25         | 32             | 40.3 | 22 | 298 | 265.5 | 195 | 93 | 79 | 85 | 10       | 1050        | 402UD10G-32E20W |