


HOSE LOCK SPIGOT

Connection of Hoses and Pipe Fittings



► SPECIFICATION

Material: UPVC+ABS
Size: DN15~DN25、18mm~33mm
Standard: DIN
Connection: SPIGOT

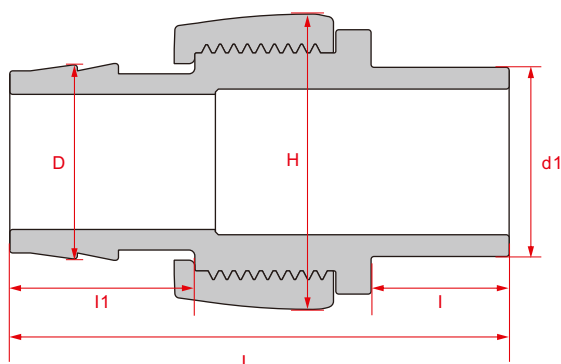

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE					
d1* Φ D	d1	D	I	I1	L	H
20mm $\times$ Φ 18	20	18	15.5	25	65	35
20mm $\times$ Φ 21	20	21	15.5	25	65	35
25mm $\times$ Φ 21	25	21	19	25	68.5	35
25mm $\times$ Φ 27	25	27	19	31.5	80.5	50.8
32mm $\times$ Φ 27	32	27	23.5	31.5	85	50.8
32mm $\times$ Φ 33	32	33	23.5	31.5	85	50.8

THREADED QUICK-TIGHTENING DESIGN

- It adopts a threaded screw-tightening structure for fast installation and removal. It enables quick locking and fits various hose specifications, ensuring a firm, secure connection with no risk of detachment.

ALL-PLASTIC, CORROSION-RESISTANT & DURABLE

- The fitting body is made of industrial-grade UPVC with excellent corrosion resistance, suitable for seawater and corrosive liquid environments. The nut is manufactured from virgin ABS material, delivering a long service life and superior weather resistance.

SPIGOT DESIGN FOR VERSATILE APPLICATIONS

- The connection end features a spigot design, enabling direct solvent welding with socket fittings and valves. It delivers a seamless transition between rigid and flexible pipes, suitable for a wide range of systems, equipment and application scenarios.

STRICT QUALITY MANAGEMENT SYSTEM

- We strictly implement the ISO 9001:2015 quality management system, implementing effective control over the production process to ensure consistent product quality. Guided by Flowcolour's philosophy of "Flow Creates Value," we deliver products with excellent cost-performance ratio.