


DRAIN BALL VALVE

**Compact Design,
Effortless Control**



►► SPECIFICATION

Material: UPVC
Size: DN15~DN25
Standard: DIN
Connection: SOCKET

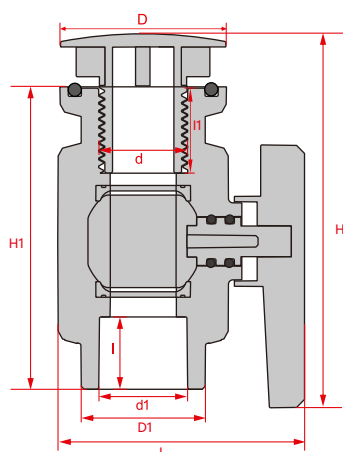

INTEGRATED SEALED DESIGN

- Features a **built-in O-ring** and an **integrated structure** for a more **compact size**, offering greater flexibility in confined spaces.

EXTENDED CLAMPING THICKNESS

- Adaptable to various hole sizes, meeting the installation requirements of **over 95% of fish aquarium**.

LARGE BORE FOR HIGH-FLOW EFFICIENCY

- Large drainage outlet **provides excellent flow guidance**, ensuring rapid discharge of sediment and impurities from tanks.

STRICT QUALITY MANAGEMENT SYSTEM

- Strictly compliant with the **ISO 9001:2015** quality management system, we maintain effective control over production to ensure consistent product quality. Aligned with **Flowcolour®'s "FLOW CREATES VALUE"** philosophy, our products offer outstanding cost-effectiveness.

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE									PRESSURE	HOLE SIZE	CLAMPING THICKNESS
DN	d1	d	D	D1	I	I1	H	H1	I1	PN		
DN15	20	1/2"	38	28	16.2	19.6	85	69	57	10	20-23	7-12
DN20	25	3/4"	45	34	18.7					10	25-28	8-25
DN25	32	1"	52	42.7	22.2					10	32-35	10-30