

DUAL SPIGOT TEE

Space Saving and
Efficient Installation



► SPECIFICATION

Material: UPVC
Size: DN15
Standard: DIN
Connection: SOCKET*SPIGOT

STANDARDS THAT MEET THE REQUIREMENTS OF INDUSTRIAL GRADE

- According to standards **EN ISO 15493** and complying with **PN16** pressure requirement.

PRODUCT WITH INSTALLATION AUXILIARY LINE SYSTEM


- The product is **equipped with an installation auxiliary line system**, which facilitates the alignment and installation of 45°, 90°, 135° and other angles.

HIGHLIGHTING POLISHING

- The **polishing with high finish** can make the surface as smooth as the inner cavity and **reduce the deposition of chemical substances**.

PROVIDES VARIOUS CONNECTION POSSIBILITIES FOR COMPACT DEVICES

- It can significantly **reduce the connection size between pipes and pipes**, solve the problem of compact equipment installation space, reduce the number of bonding, and improve construction efficiency and equipment stability.

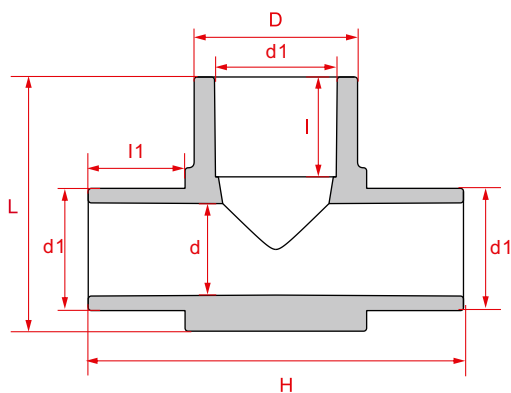

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE							PRESSURE
DN	d1	D	d	I	l1	L	H	PN
DN15	20	27	15.4	16.5	16	42	62	16