



REDUCER COUPLING

Standard Dimensions,
Seamless Transition

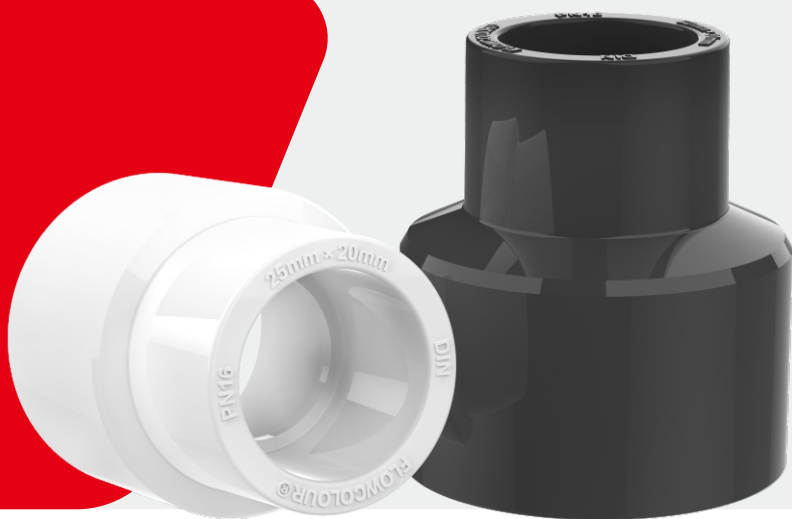

► SPECIFICATION

Material: UPVC
Size: 25x20mm、32x20mm、32x25mm
Standard: DIN
Connection: SOCKET

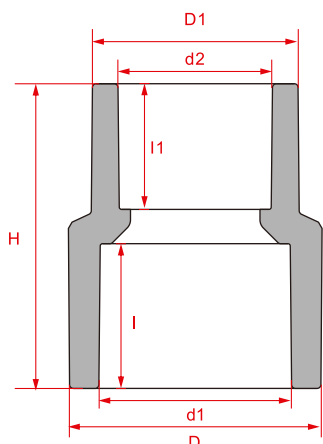

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE							PRESSURE
d1*d2	d1	d2	D	D1	H	I	I1	PN
25x20mm	25	20	33	27	40	19	16.5	16
32x20mm	32	20	40.5	27	45.5	22.5	16.5	16
32x25mm	32	25	40.5	33	47	22.5	19	16

STANDARDS THAT MEET INDUSTRIAL GRADE REQUIREMENTS

- Strictly implement the **ISO15493-2003,GB/T4219.2-2015 standard**, meet the industrial standard; meet the **PN16 pressure rating**;

PRODUCT WITH INSTALLATION AUXILIARY LINE SYSTEM

- The product has an **installation auxiliary line system**, which is convenient for **45 degrees, 90 degrees, 135 degrees, etc.**, for angle alignment installation;

STRICT QUALITY MANAGEMENT SYSTEM

- Adheres strictly to the **ISO 9001:2015** quality management system, ensuring effective control over the production process to maintain consistent product quality. Following the **Flowcolour®** philosophy of "**FLOW CREATES VALUE**" ensuring excellent cost-effectiveness of the products.

