


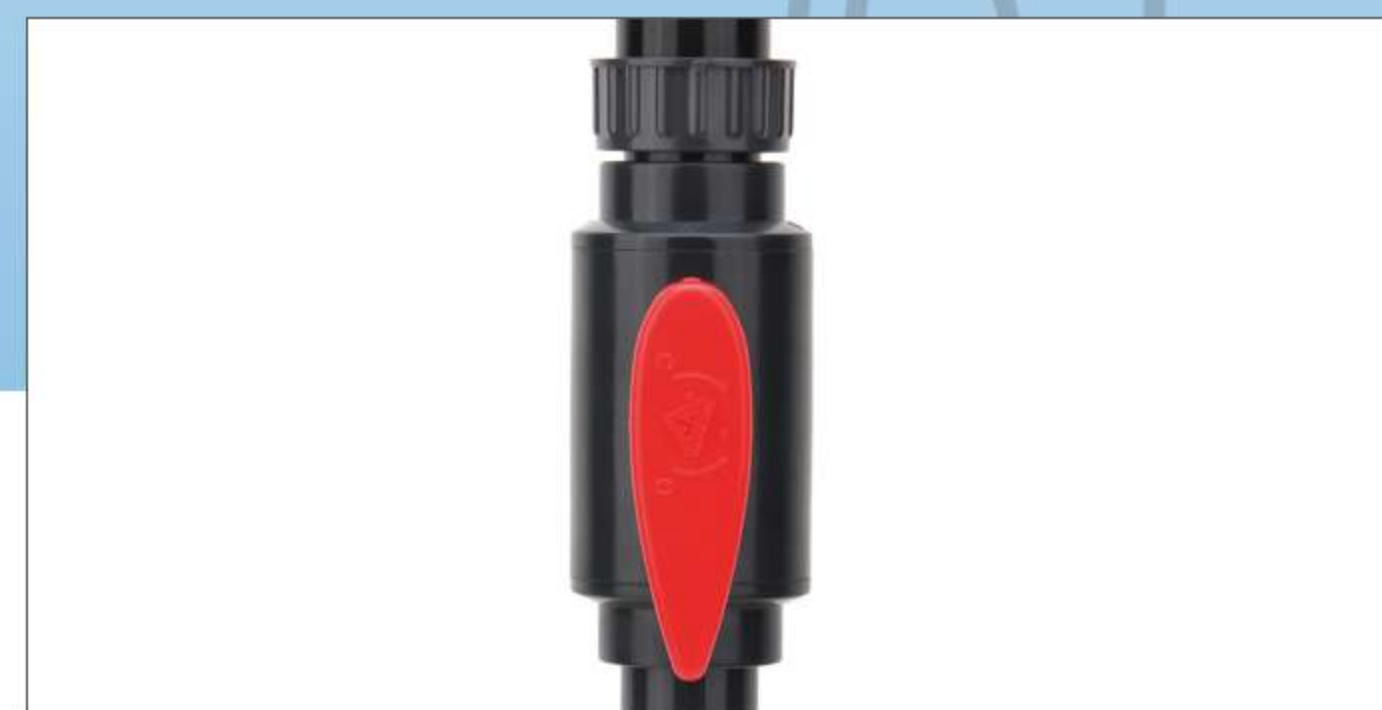

► SPECIFICATIONS

Size: 25mm*32mm

Material: UPVC

Standard: DIN

Connection: Socket Spigot

Use For Reefer Series XL425 XL525 XXL625

XXL750 XXXL900 Peninsula500 Peninsula650

Max-S Series 400 500 650

► PRODUCT FEATURES

Industrial-grade quality perfectly replaces original Red Sea Accessory


Using industrial pipeline design standard, the union connector depth conforms to the 10kg pressure specification for water supply. Thread size is the same as the original Red Sea Product. Allowing DIY enthusiast to better transform the tank to their needs.

High-grade virgin materials used. Can be used in salt water environment

Union connector is produced from UPVC raw materials that meet the drinking water standards, and it is safe, non-toxic, aging and corrosion-resistant for long-term use in seawater environment.

Modern Quality Control System

Following the Flowcolour's motto of "FLOW CREATES VALUE" The full line of products is produced in accordance to ISO9001:2015 quality management system and batch tested to assure consistent product quality.

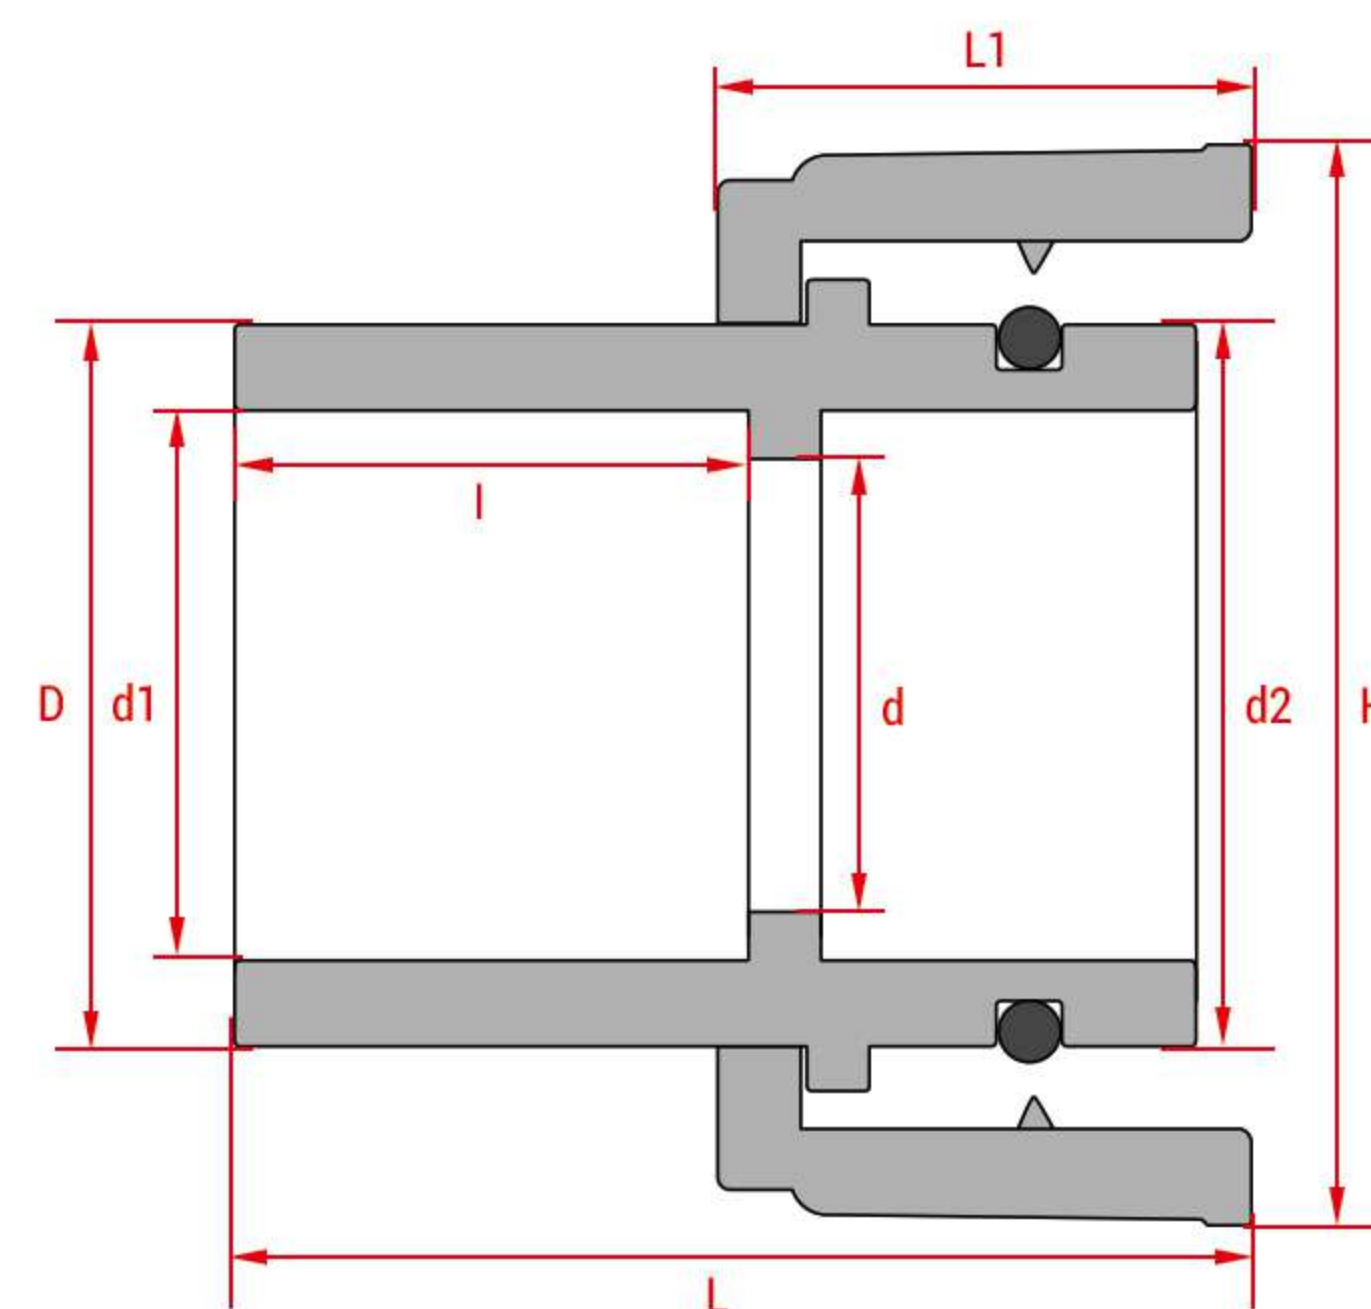

Unit: mm

SIZE	d1	d2	D	d	I	L	L1	H	PN
25*32	25	31.9	32	21	23	42	21	48	10