


BULKHEAD

**Tightly Sealed
Dedicated for Box**



► SPECIFICATION

Material: UPVC
Size: DN15~DN40、1/2"~1-1/2"
Standard: DIN、ANSI
Connection: SOCKET

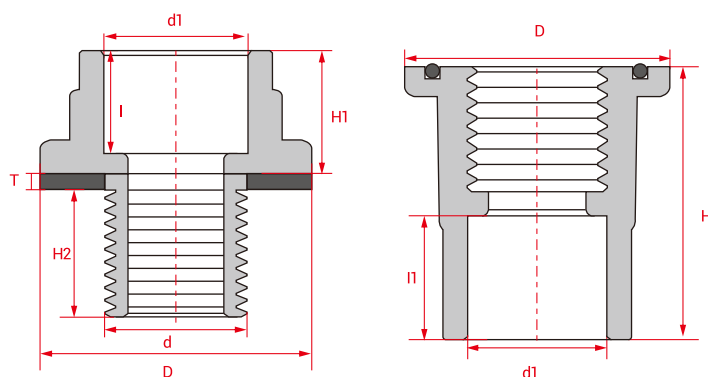

INDUSTRIAL GRADE WALL THICKNESS, GOOD SEALING EFFECT

- The improved sealing design eliminates water leakage and seepage, and is more secure in pressure bearing. The product uses industrial-grade design standards and can be used not only in aquariums but also in industrial water tanks and chemical liquid pipeline installation (corrosive liquids require replacement of seals), making it safe and secure to use.

INDUSTRIAL-GRADE FORMULA, RELIABLE MATERIAL

- The product's Vicat value is $\geq 74^{\circ}\text{C}$, ensuring corrosion resistance and safety in normal working conditions. Anti-UV ingredients are added to the formula to extend the product's outdoor service life. The formula has good biological safety and can meet the national water safety certification requirements.

EXTRA LONG OUTER TEETH, WIDER APPLICATION RANGE

- Extra long outer teeth, the plate thickness can reach more than 24mm. (40mm, 50mm models, double-ended O-ring models can clamp 30mm glass!) Meet the use of thickened cylinders and tanks.

Unit: mm

NOMINAL SIZE		d1		STRUCTURE SIZE								PRESSURE	HOLE SIZE	CLAMPING THICKNESS
DN	ANSI	DIN	ANSI	D	d	I	I1	H	H1	H2	T	PN		
DN15	1/2"	20	21.34	38	1/2"	18.2	18.8	43	22	23	3	10	20-23	5-12
DN20	3/4"	25	26.67	45	3/4"	18.8	19.9	52	22	33	3	10	25-28	6-24
DN25	1"	32	33.4	52	1"	18.3	19.2	53	22	36	3	10	32-35	8-24
DN32	1-1/4"	40	42.16	60	1-1/4"	20.3	20.2	56	23	37	3	10	40-43	8-24
DN40	1-1/2"	50	48.26	70	1-1/2"	21.8	22.4	60	29	37	3	10	50-53	0-24