

FORCE DRAIN

**Tight Seal, Special
for Aquarium**



► SPECIFICATION

Material: UPVC
Size: DN15~DN32、1/2"~1-1/4"
Standard: DIN、ANSI
Connection: SOCKET

VARIOUS STYLES, TIGHT SEALING AND NO WATER LEAKAGE


- Equipped with O silicone ring, good sealing, multiple styles are available, choose the appropriate style according to your needs (straight exhaust/elbow exhaust/ball valve exhaust).

EXTRA LONG CLAMPING THICKNESS TO MEET DIFFERENT NEEDS

- According to the hole selection, it can meet the needs of more than 95% of fish tanks.

LARGE APERTURE/LARGE FLUX WITHOUT OBSTRUCTION

- The drainage port is large, which has a good diversion effect, effectively increases the flow rate, and easily drains the sediment and impurities in the box and tank.

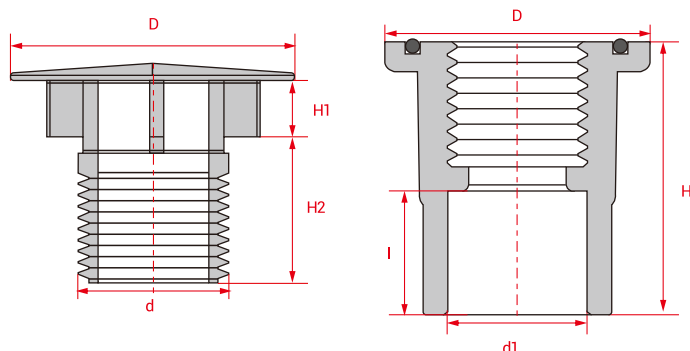

Unit: mm

NOMINAL SIZE		d1		STRUCTURE SIZE						PRESSURE	HOLE SIZE	CLAMPING THICKNESS
DN	ANSI	DIN	ANSI	d	D	I	H	H1	H2	PN		
DN15	1/2"	20	21.34	1/2"	38	18.8	43	6	22	10	20-23	7-12
DN20	3/4"	25	26.67	3/4"	45	19.9	52	9	38	10	25-28	8-25
DN25	1"	32	33.4	1"	52	19.2	53	12	38	10	32-35	10-30
DN32	1-1/4"	40	42.16	1-1/4"	61	20.2	56	11	37	10	40-43	8-24