


QUICK BULKHEAD

Convenient Connection
Dedicated For Aquarium



► SPECIFICATION

Material: UPVC
Size: DN15~DN40
Standard: DIN
Connection: SOCKET

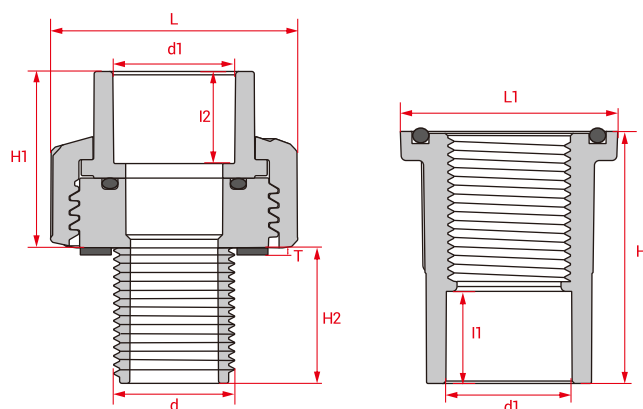

Space-saving And Easy Installation.

- The product adopts a combination design concept, combining the convenience of disassembly with the installation characteristics of water supply and drainage, saving installation space and facilitating the disassembly and assembly of fish tanks and water tank accessories. It is easy to install and simple to use.

Industrial-Grade Formula, Reliable Material.

- The product's Vicat value is $\geq 74^{\circ}\text{C}$, ensuring corrosion resistance and safety under standard operating conditions. The formula includes UV-resistant components, extending the product's outdoor lifespan. Additionally, the formula has excellent biosecurity, meeting national water safety certification requirements.

Wider Applicability.

- The extra-long external thread can penetrate a thickness of over 24mm (for 40mm and 50mm models, the double O-ring version can hold 30mm glass). This design accommodates thicker tanks and containers.

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE										PRESSURE	HOLE SIZE	CLAMPING THICKNESS
DN	d1	d	I1	I2	L	L1	H	H1	H2	T	PN		
DN15	20	1/2"	18.8	16.5	44.5	38	43	31.8	23	2	10	20-23	0-12
DN20	25	3/4"	19.9	19	51	45	52	36.4	35	2	10	25-28	0-19
DN25	32	1"	19.2	22.5	59	52	53	40.3	40	2	10	32-35	8-25
DN32	40	1-1/4"	20.2	26.5	73	60	56	47	40	2	10	40-43	8-25
DN40	50	1-1/2"	22.4	31.5	85	70	60	54.5	40	2	10	50-53	0-25