



## ► SPECIFICATIONS

Size: 1/2"-2"

Material: UPVC

Standard: DIN, ANSI

Connection: PT, NPT

## ► PRODUCT FEATURES

### High-precision mold production, in line with standard threads.


For a smooth surface of the thread, a lathe is used to machine the mold. Make the threaded surface seamless, smooth and smooth. In the production process, the standard thread is used for inspection to meet the standard requirements.

### More models, suitable for industrial requirements

It has PT and NPT threads, and the wall thickness meets the pressure standard of 16 kg. In order to facilitate customer installation, the middle T width is thickened for easy tightening.

### Modern Quality Control System

ISO9001:2015 is adopted so that the complete production process is monitored and product quality is stabilized. Our credo "Flow Creates Value" instructs us to guarantee the C/P ratio.

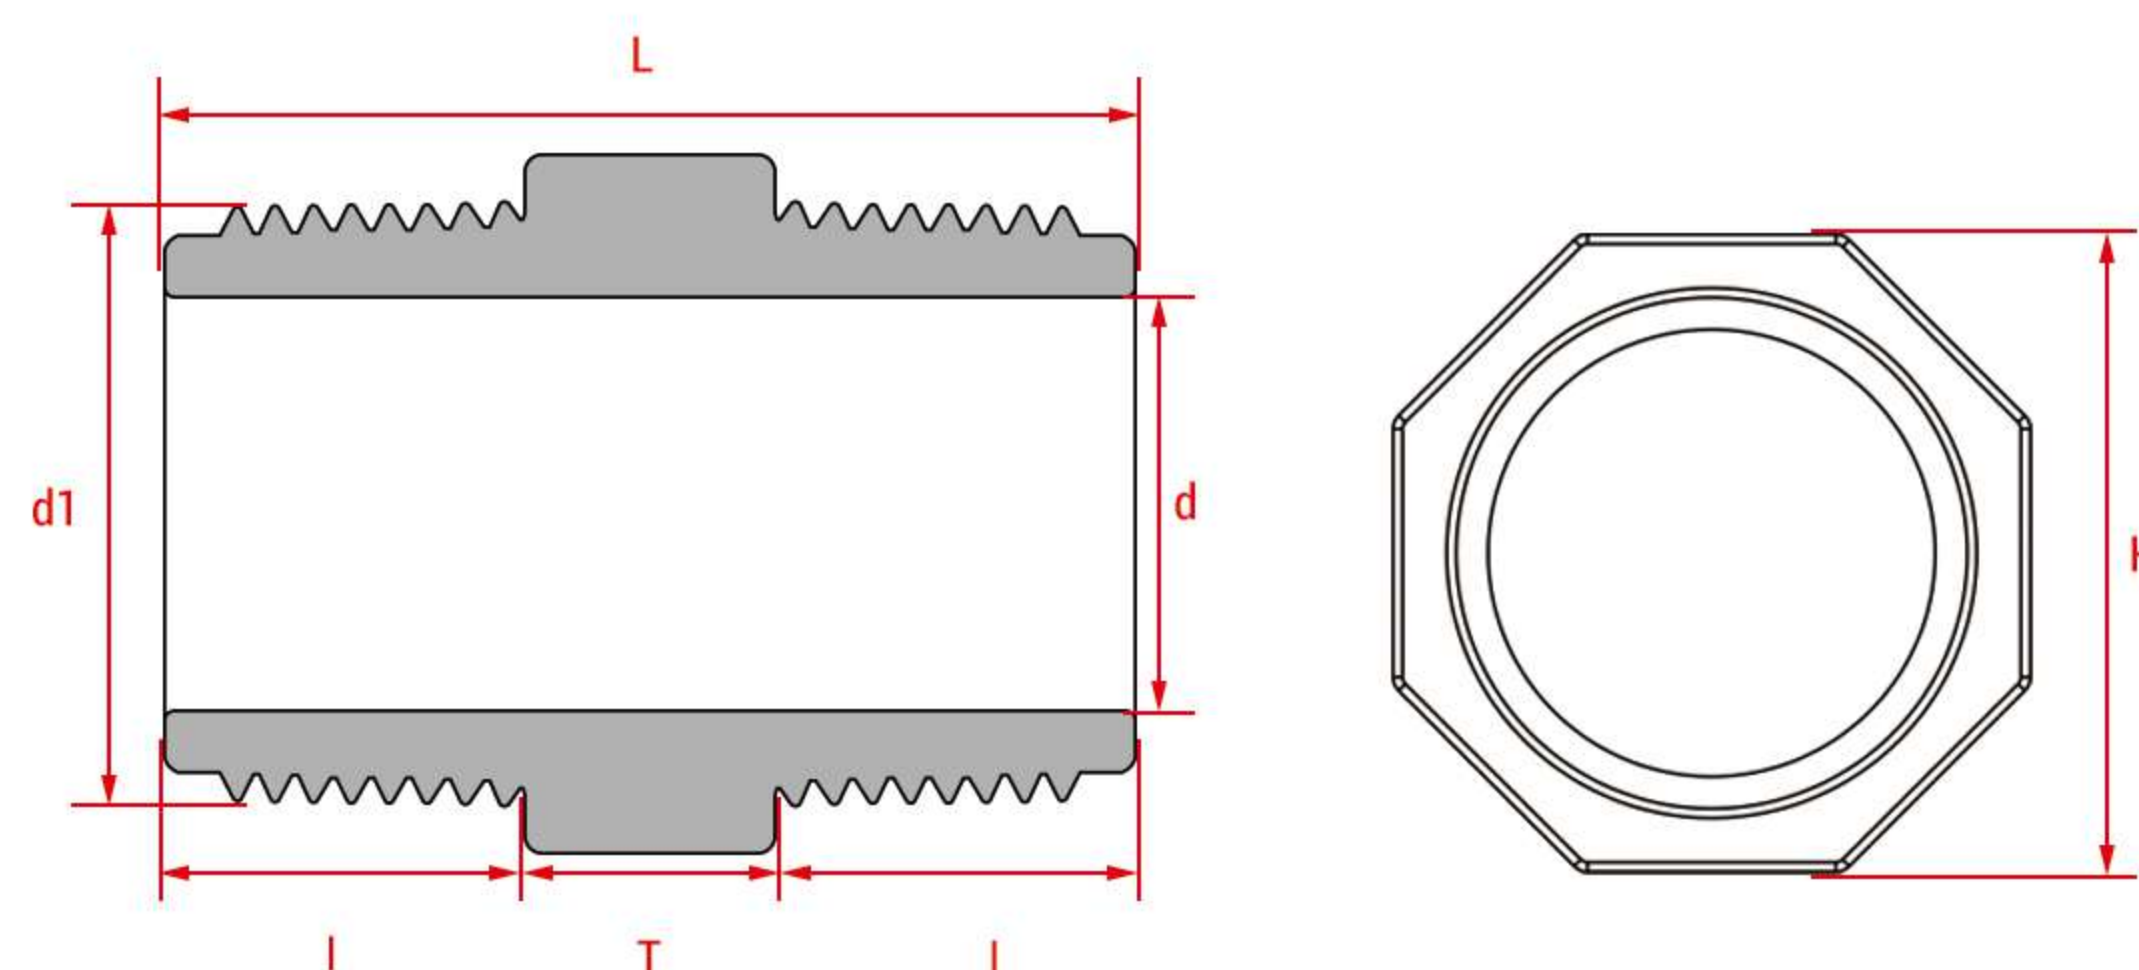

Unit: mm

| SIZE |        | d1     | d  |     | I    |      | L    |     | H  | T  | PN |
|------|--------|--------|----|-----|------|------|------|-----|----|----|----|
| DN   | Inch   | PT/NPT | PT | NPT | PT   | NPT  | PT   | NPT |    |    |    |
| DN15 | 1/2"   | 1/2"   | 13 | 13  | 15   | 17   | 42   | 46  | 26 | 12 | 16 |
| DN20 | 3/4"   | 3/4"   | 18 | 18  | 16.3 | 17.5 | 44.6 | 47  | 32 | 12 | 16 |
| DN25 | 1"     | 1"     | 23 | 22  | 19.1 | 21   | 50.2 | 54  | 38 | 12 | 16 |
| DN32 | 1-1/4" | 1-1/4" | 31 | 31  | 21.5 | 22   | 58   | 59  | 48 | 15 | 16 |
| DN40 | 1-1/2" | 1-1/2" | 36 | 36  | 21.5 | 22   | 58   | 59  | 52 | 15 | 16 |
| DN50 | 2"     | 2"     | 46 | 46  | 25.7 | 23   | 66.4 | 61  | 67 | 15 | 16 |