
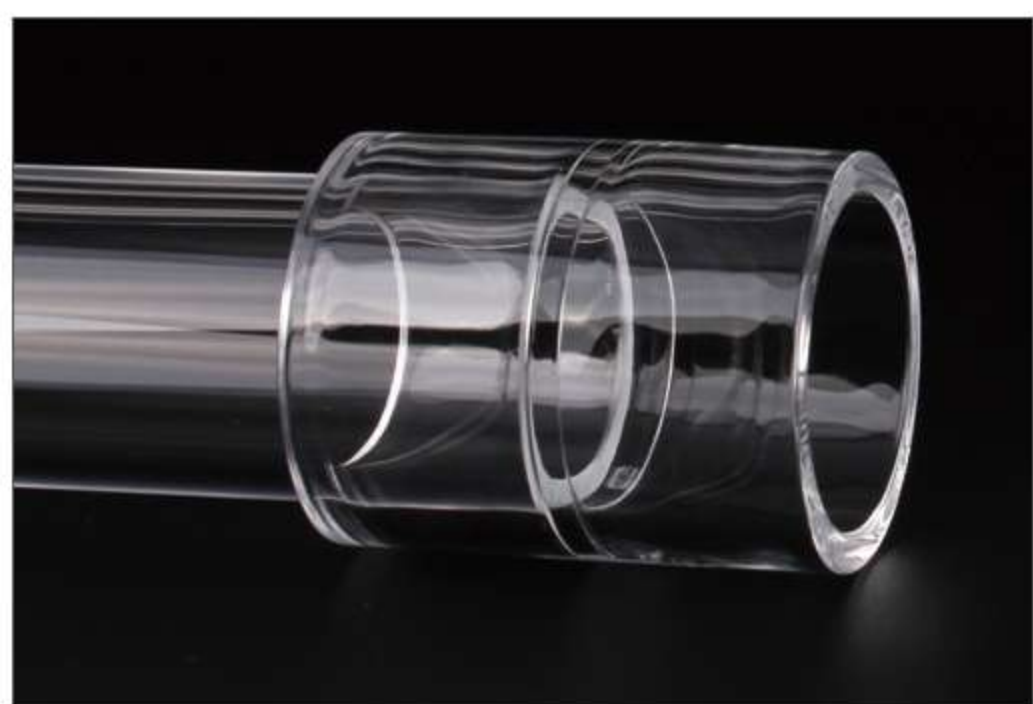


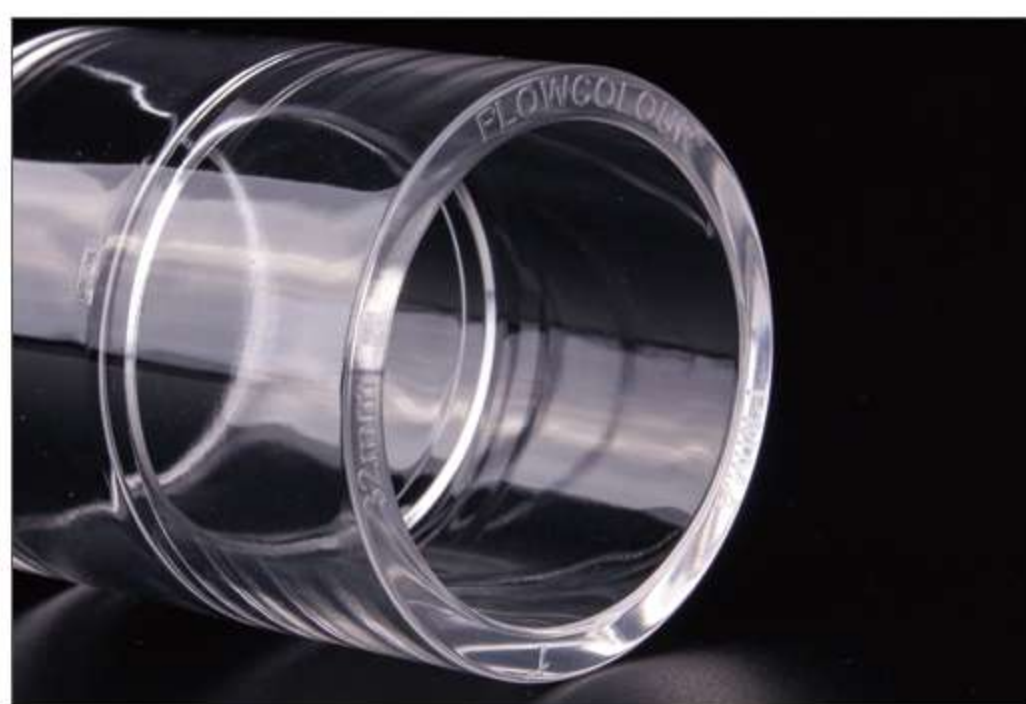

►► SPECIFICATIONS

Size: DN15-DN40


Material: PMMA

Standard: DIN

Connection: Socket

►► PRODUCT FEATURES

- 1.Using Japan's **Mitsubishi optical grade** acrylic raw materials, **the light transmittance is as high as 93%**.
- 2.The interface implements the **ISO 15493-2003 standard**, which is convenient to connect with the same standard products.
- 3.The wall thickness of the product is greater than the **GB/T 10002.2 standard**, which **improves the compression resistance**.
- 4.Can be widely used in experiments, testing, demonstration, breeding and

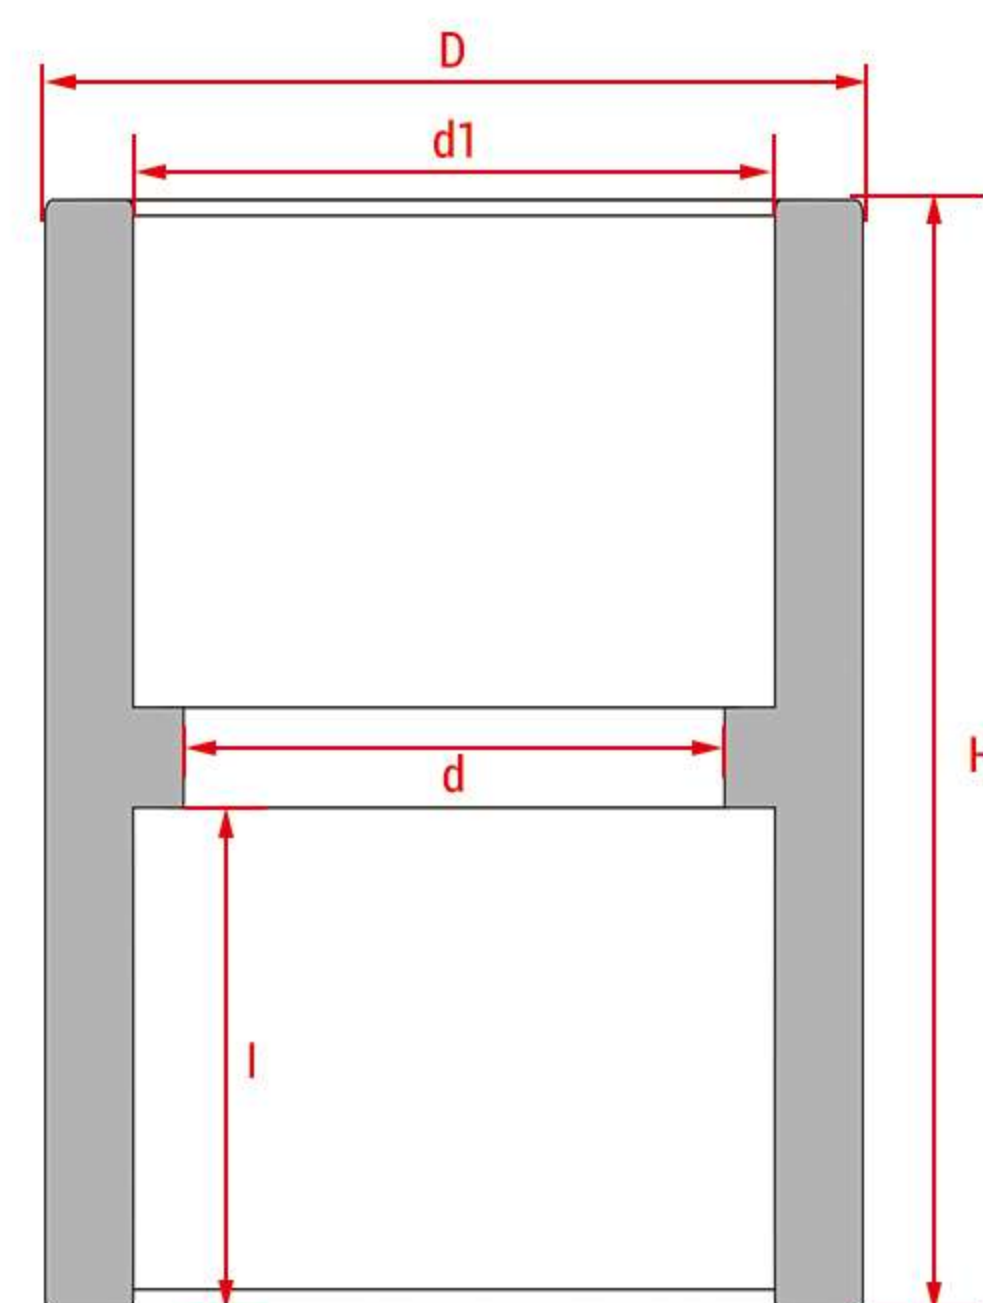

Unit: mm

SIZE	d1	D	d	l	H	PN
DN15	20	25.9	19	16.5	35	10
DN20	25	31.7	24	19	40.5	10
DN25	32	39.5	30	22.5	47.5	10
DN32	40	48.3	38.5	26	55	10