

Socket/Spigot Sampling Valve



► SPECIFICATIONS

Size: 8mm*20mm、12mm*20mm

Material: UPVC、ABS

Standard: DIN

Connection: Socket、Spigot

► PRODUCT FEATURES

Redefining the sampling valve with the modular design

The Traditional ball valve is transformed and the connection end are innovatively separated. Modular design simplified the process of assembly, application and maintenance.

Larger handle and a more user-friendly design


The large T shaped handle is ergonomic and the contact area is up to 200% larger than the common sampling valve handle on the market. It is more agile and reduce the chance of misoperation and improves the valves response sensitivity.

Abundant types of accessories to adapt to different connection methods

6 varieties of accessories, 15 kind of combination. The scope of application is greatly improved and customized assembly can be made according to customer needs , which meets the application of sampling valves in almost all scenarios.

Solid virgin materials used to maintain product quality

The sampling valve body has a thickened designed and uses a PTFE o ring which is smoothly combined with the spherical center and can easily meet the PN10 pressure standard.

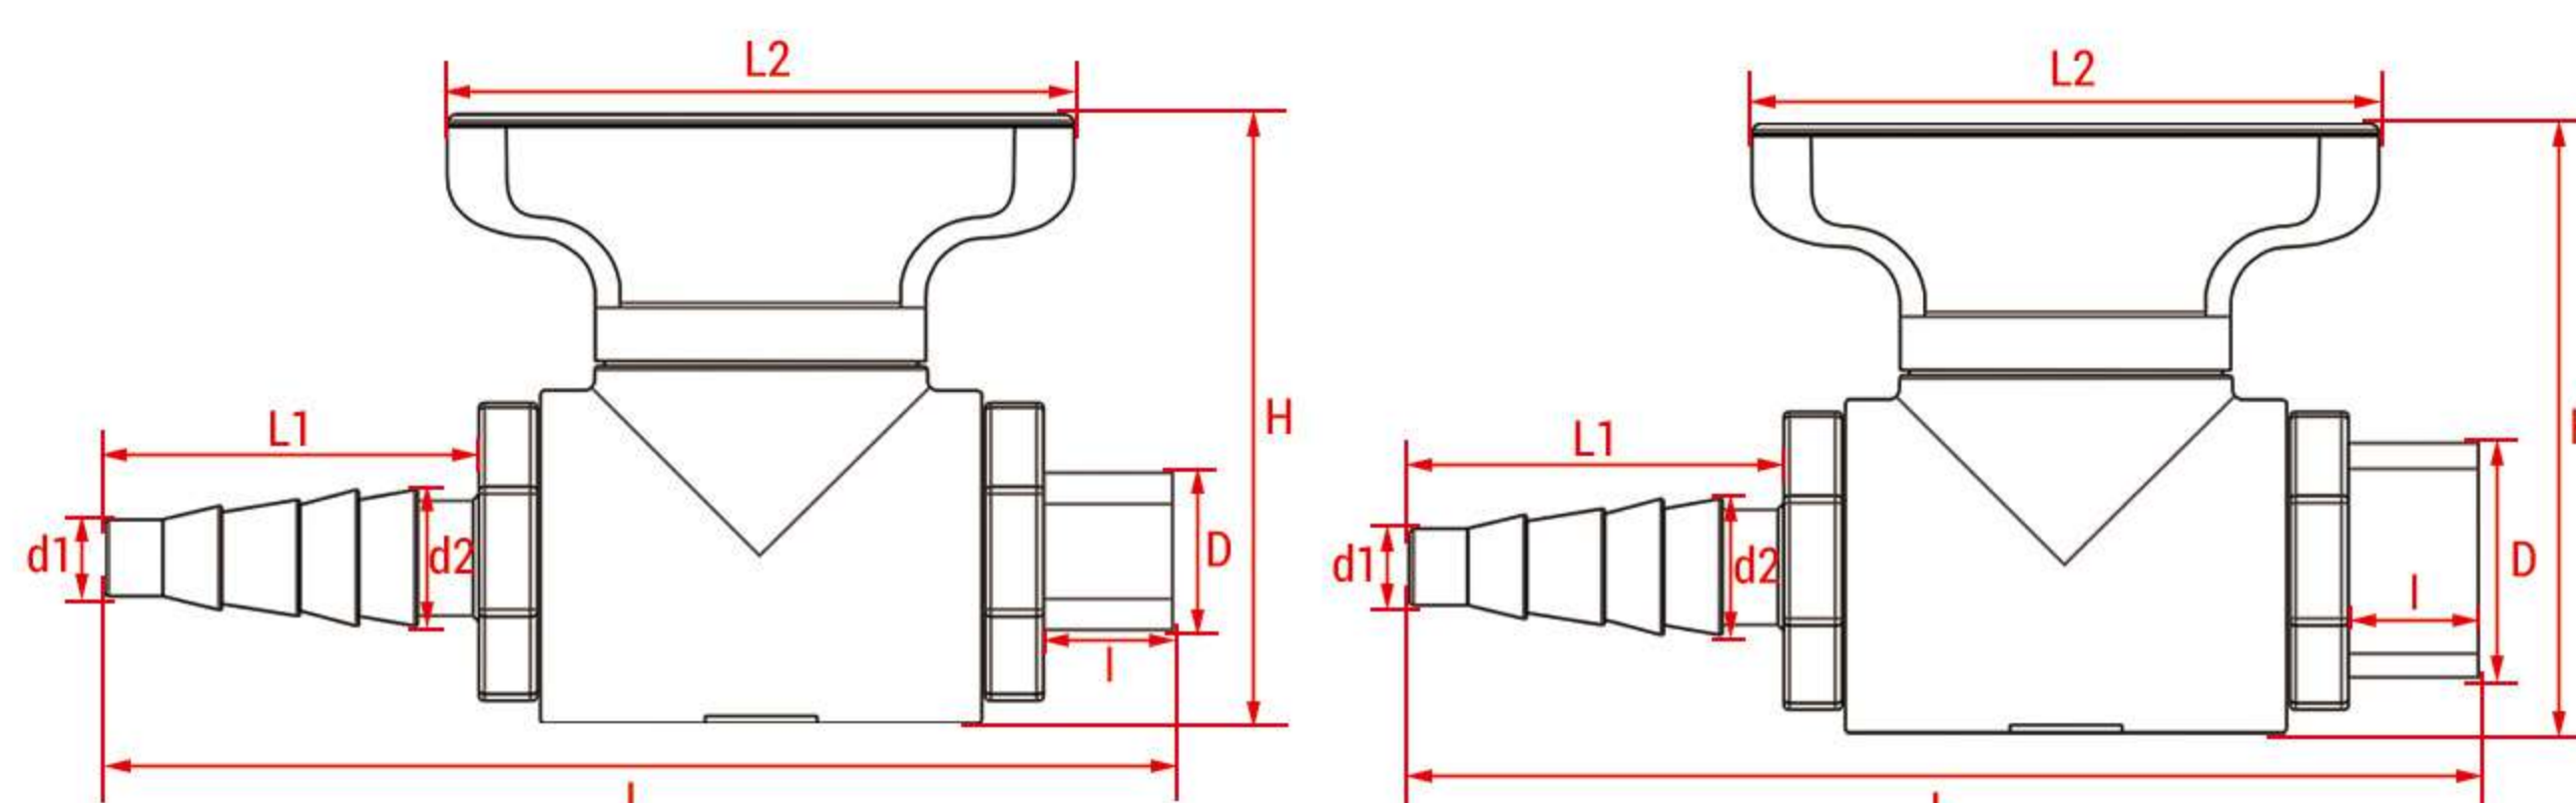

Pic.1

Pic.2

Unit: mm

d1*D	d1	d2	D	I	L	L1	L2	H	RD
8mm*20mm(spigot)	8	14	20	19.5	118	38	64.2	63.5	Pic.1
8mm*20mm(socket)	8	14	20	22.5	121	38	64.2	63.5	Pic.2
12mm*20mm(spigot)	12	--	20	--	--	--	--	--	Pic.1
12mm*20mm(socket)	12	--	20	--	--	--	--	--	Pic.2