




FEMALE SAMPLING HEADER

2"x200mm

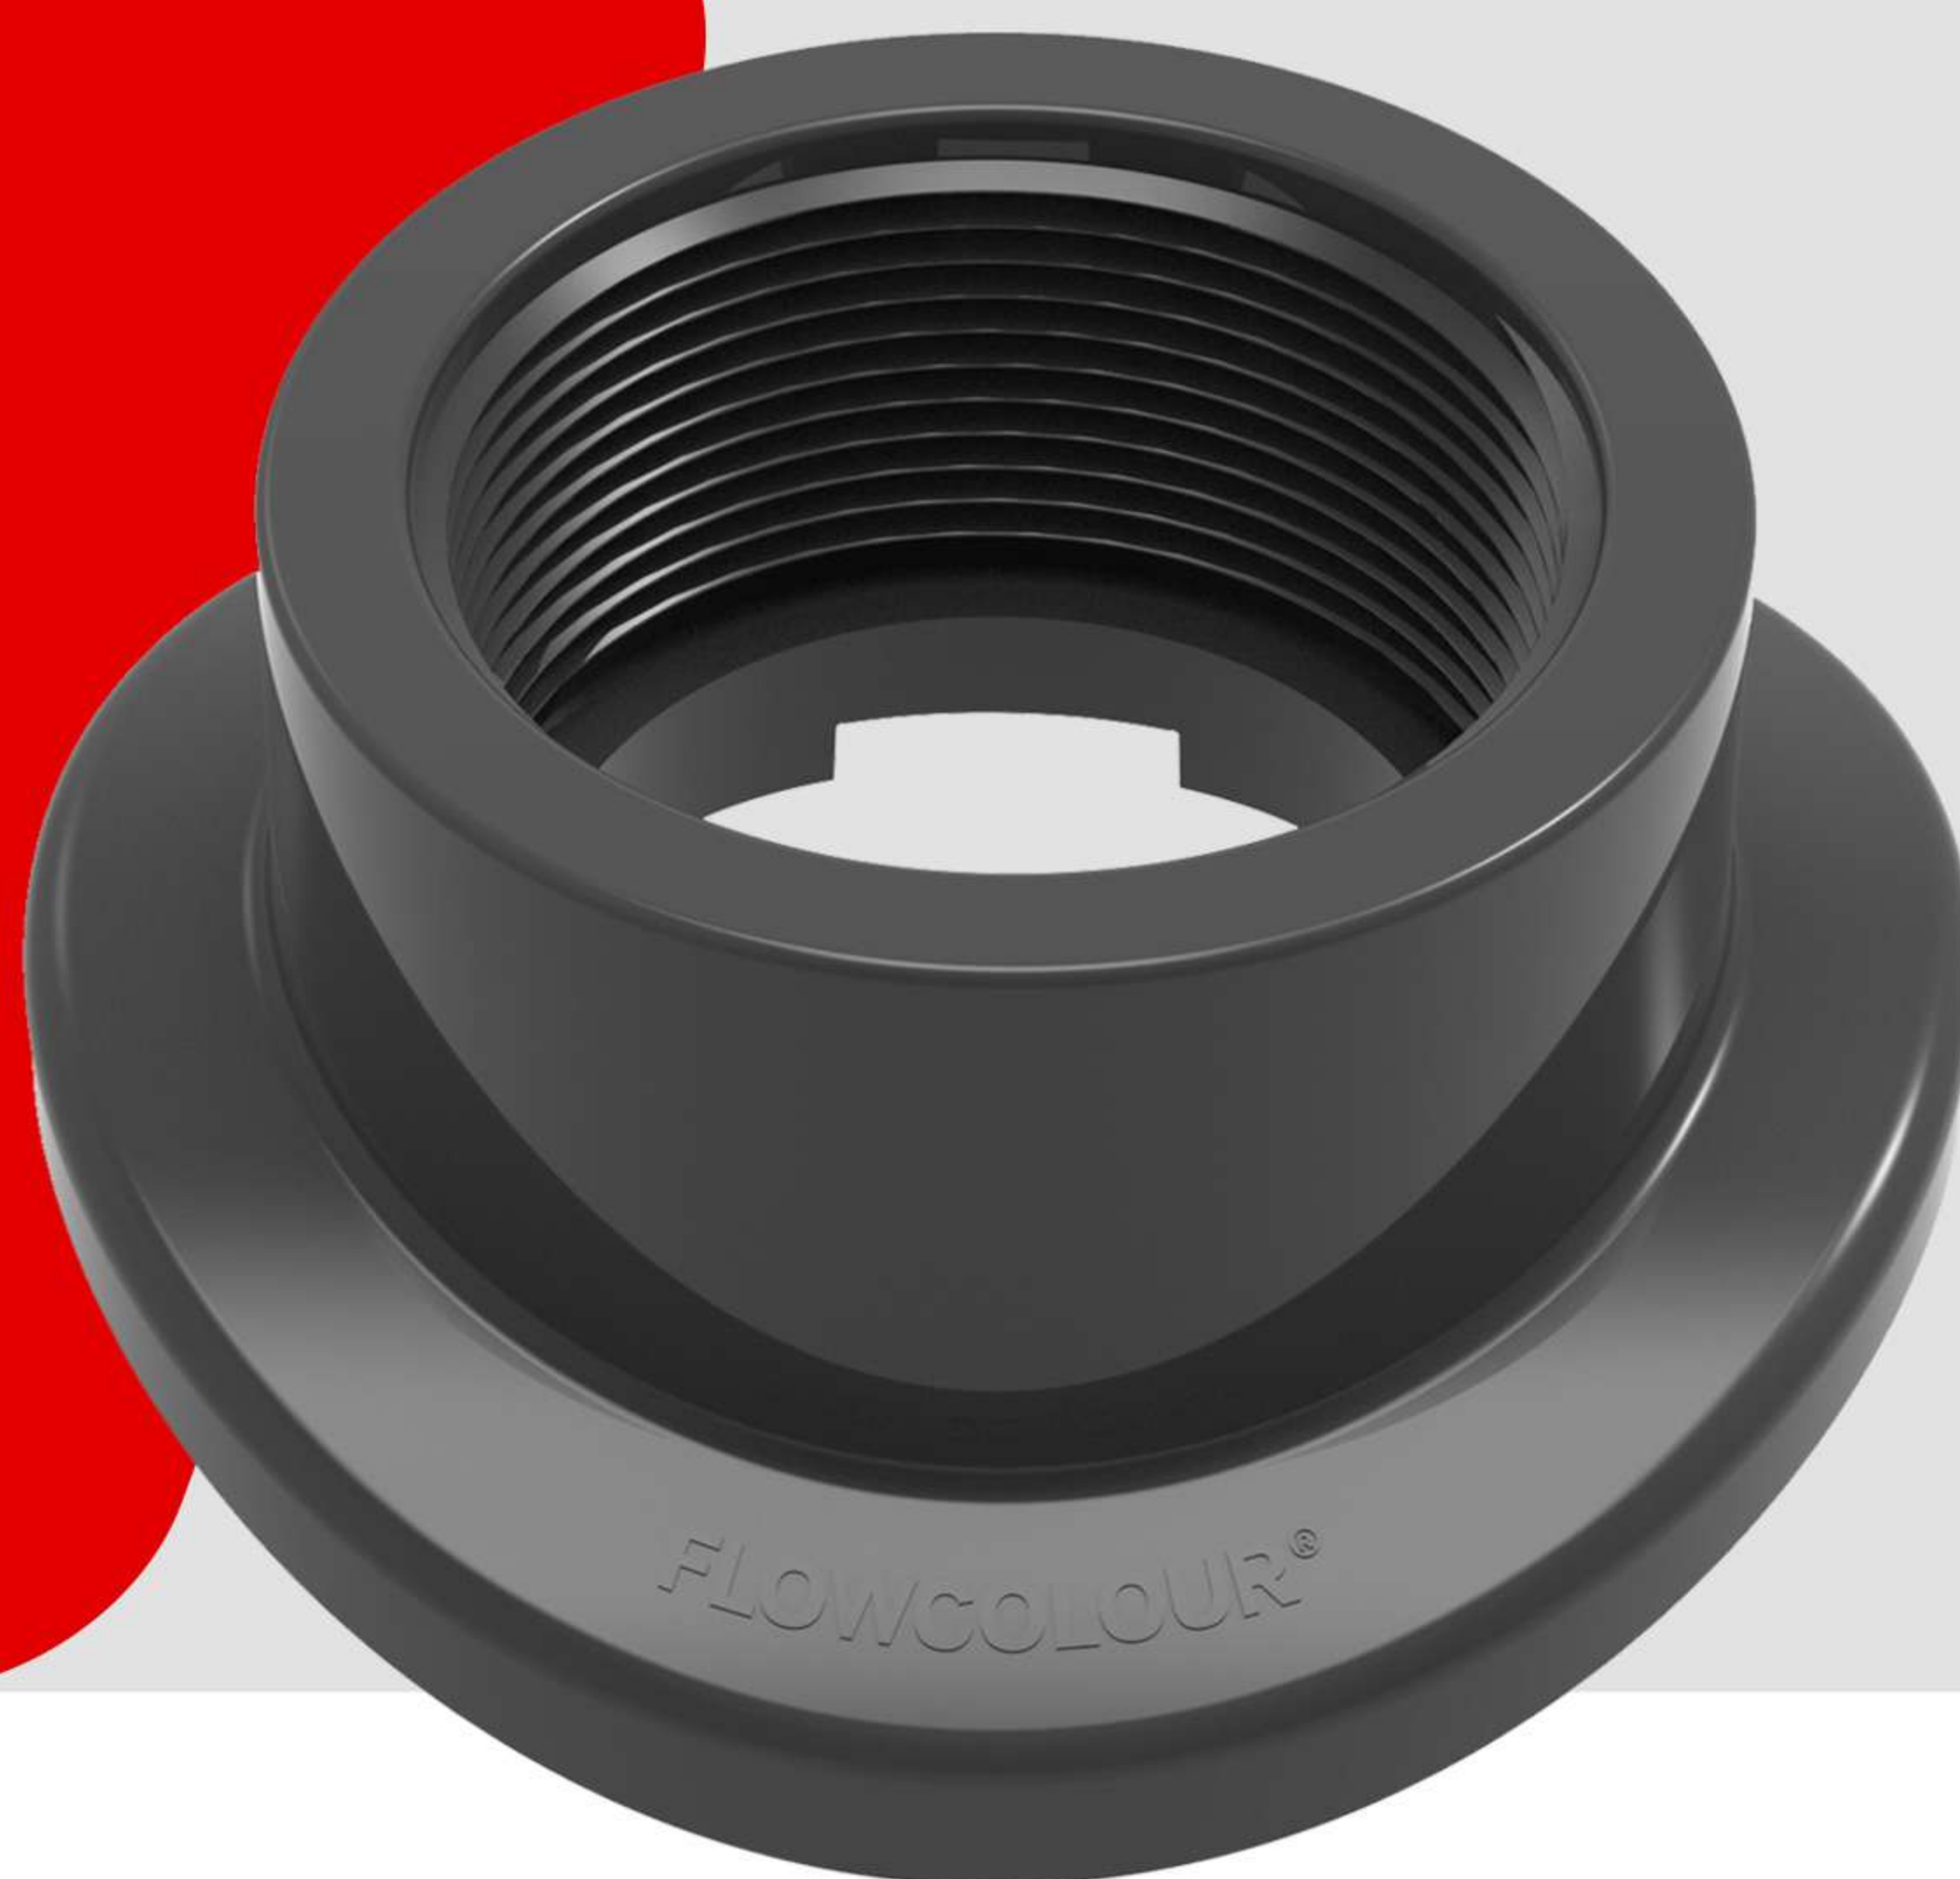

☆ SPECIFICATION

MATERIAL: UPVC
SIZE: 2"x200mm, 2"x250mm
STANDARD: DIN
CONNECTION: THREAD

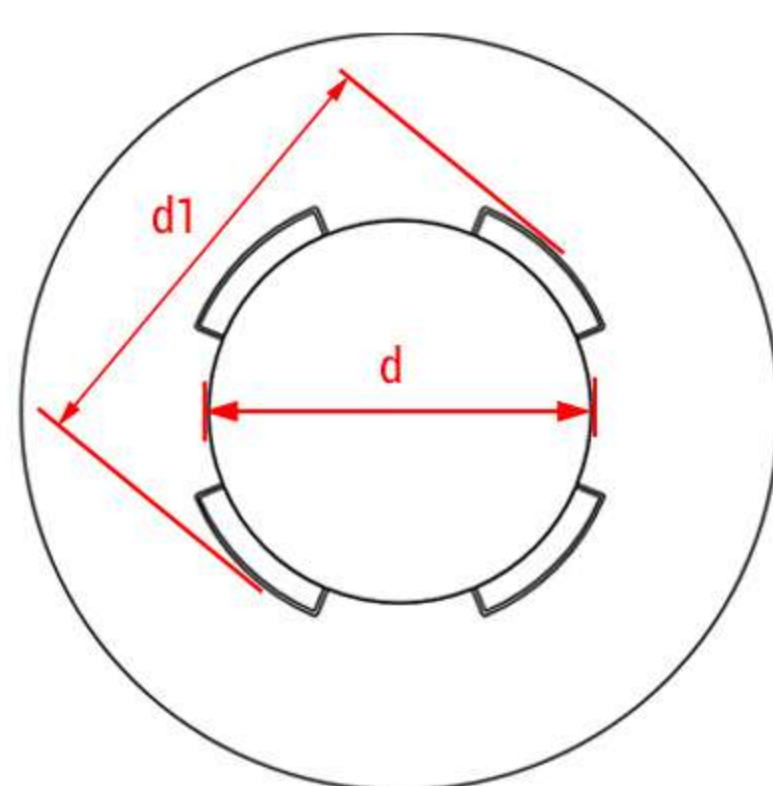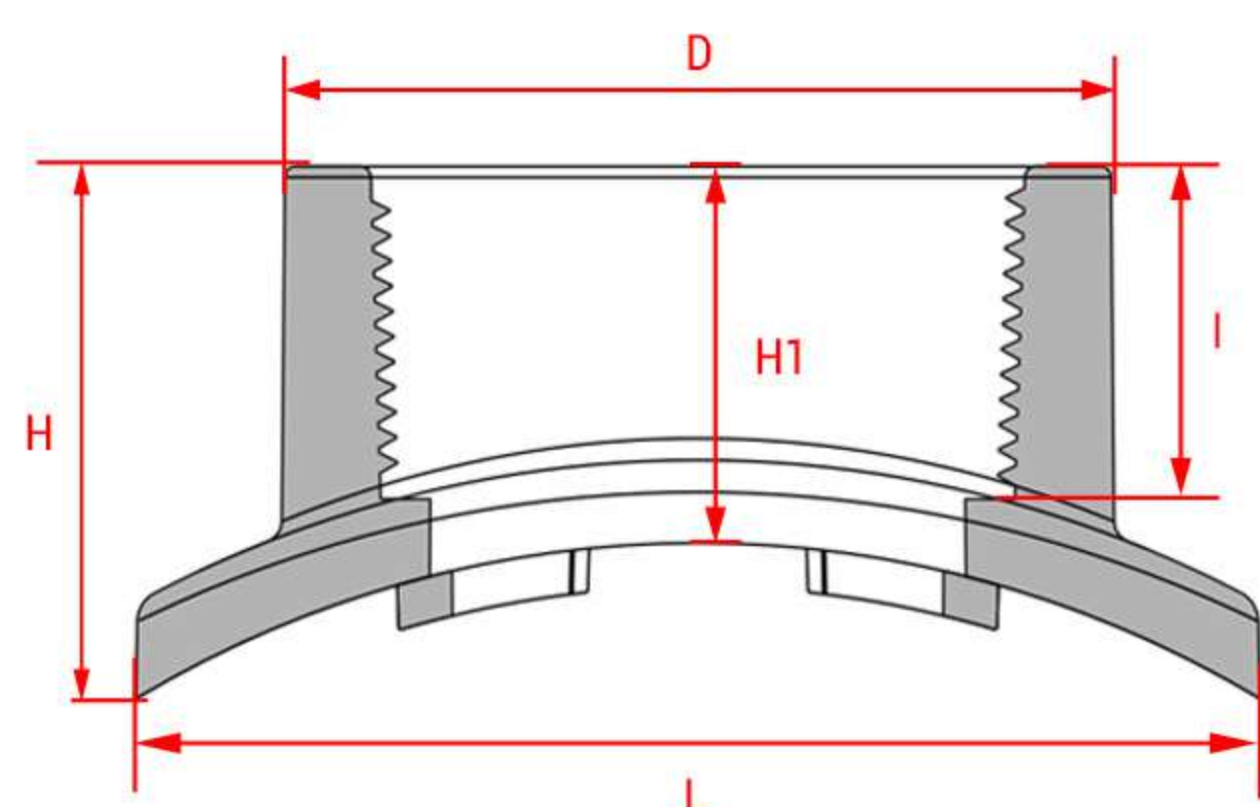

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE							PRESSURE
DN	D	d1	d	I	L	H	H1	PN
2"x200mm	75.72	60	52	30.5	103	48.8	34.5	10
2"x250mm	75.72	55	49	30.5	103	45.6	35	10

STRICT QUALITY MANAGEMENT SYSTEM

- Strict adherence to the **ISO 9001:2015** quality management system, effectively controlling the production process of the product to ensure consistent quality. Following the Flowcolour® philosophy of "**FLOW CREATES VALUE**", This enables our products to have excellent cost-effectiveness.

STANDARD THREAD

- The thread conforming to the **PT standard** has specially lengthened the assembly allowance of the **thread to enhance the tightness of the connection**.

SPECIAL LIMIT STRUCTURE

- The specially designed **installation limit structure** can effectively avoid liquid accumulation in the pipeline and allow the liquid in the pipeline to be completely emptied.

INDUSTRIAL-GRADE THICKENED DESIGN

- The thread wall thickness is thickened** to prevent thread deformation or cracking caused by force.

ULTRA-HIGH SURFACE SMOOTHNESS OF THE INNER WALL.

- Highly polished with a high degree of surface smoothness**, ensuring that the surface is as smooth as the inner cavity. This effectively reduces the deposition of chemical substances and provides enhanced product stability.