

FLANGED STATIC MIXER


DN75-DN100

AVAILABLE IN 2 STYLES

Transparent/Gray


☆ SPECIFICATION

MATERIAL: UPVC、CLEAR-PVC
 SIZE: 75mm-110mm
 STANDARD: DIN
 CONNECTION: RF-FLANGE

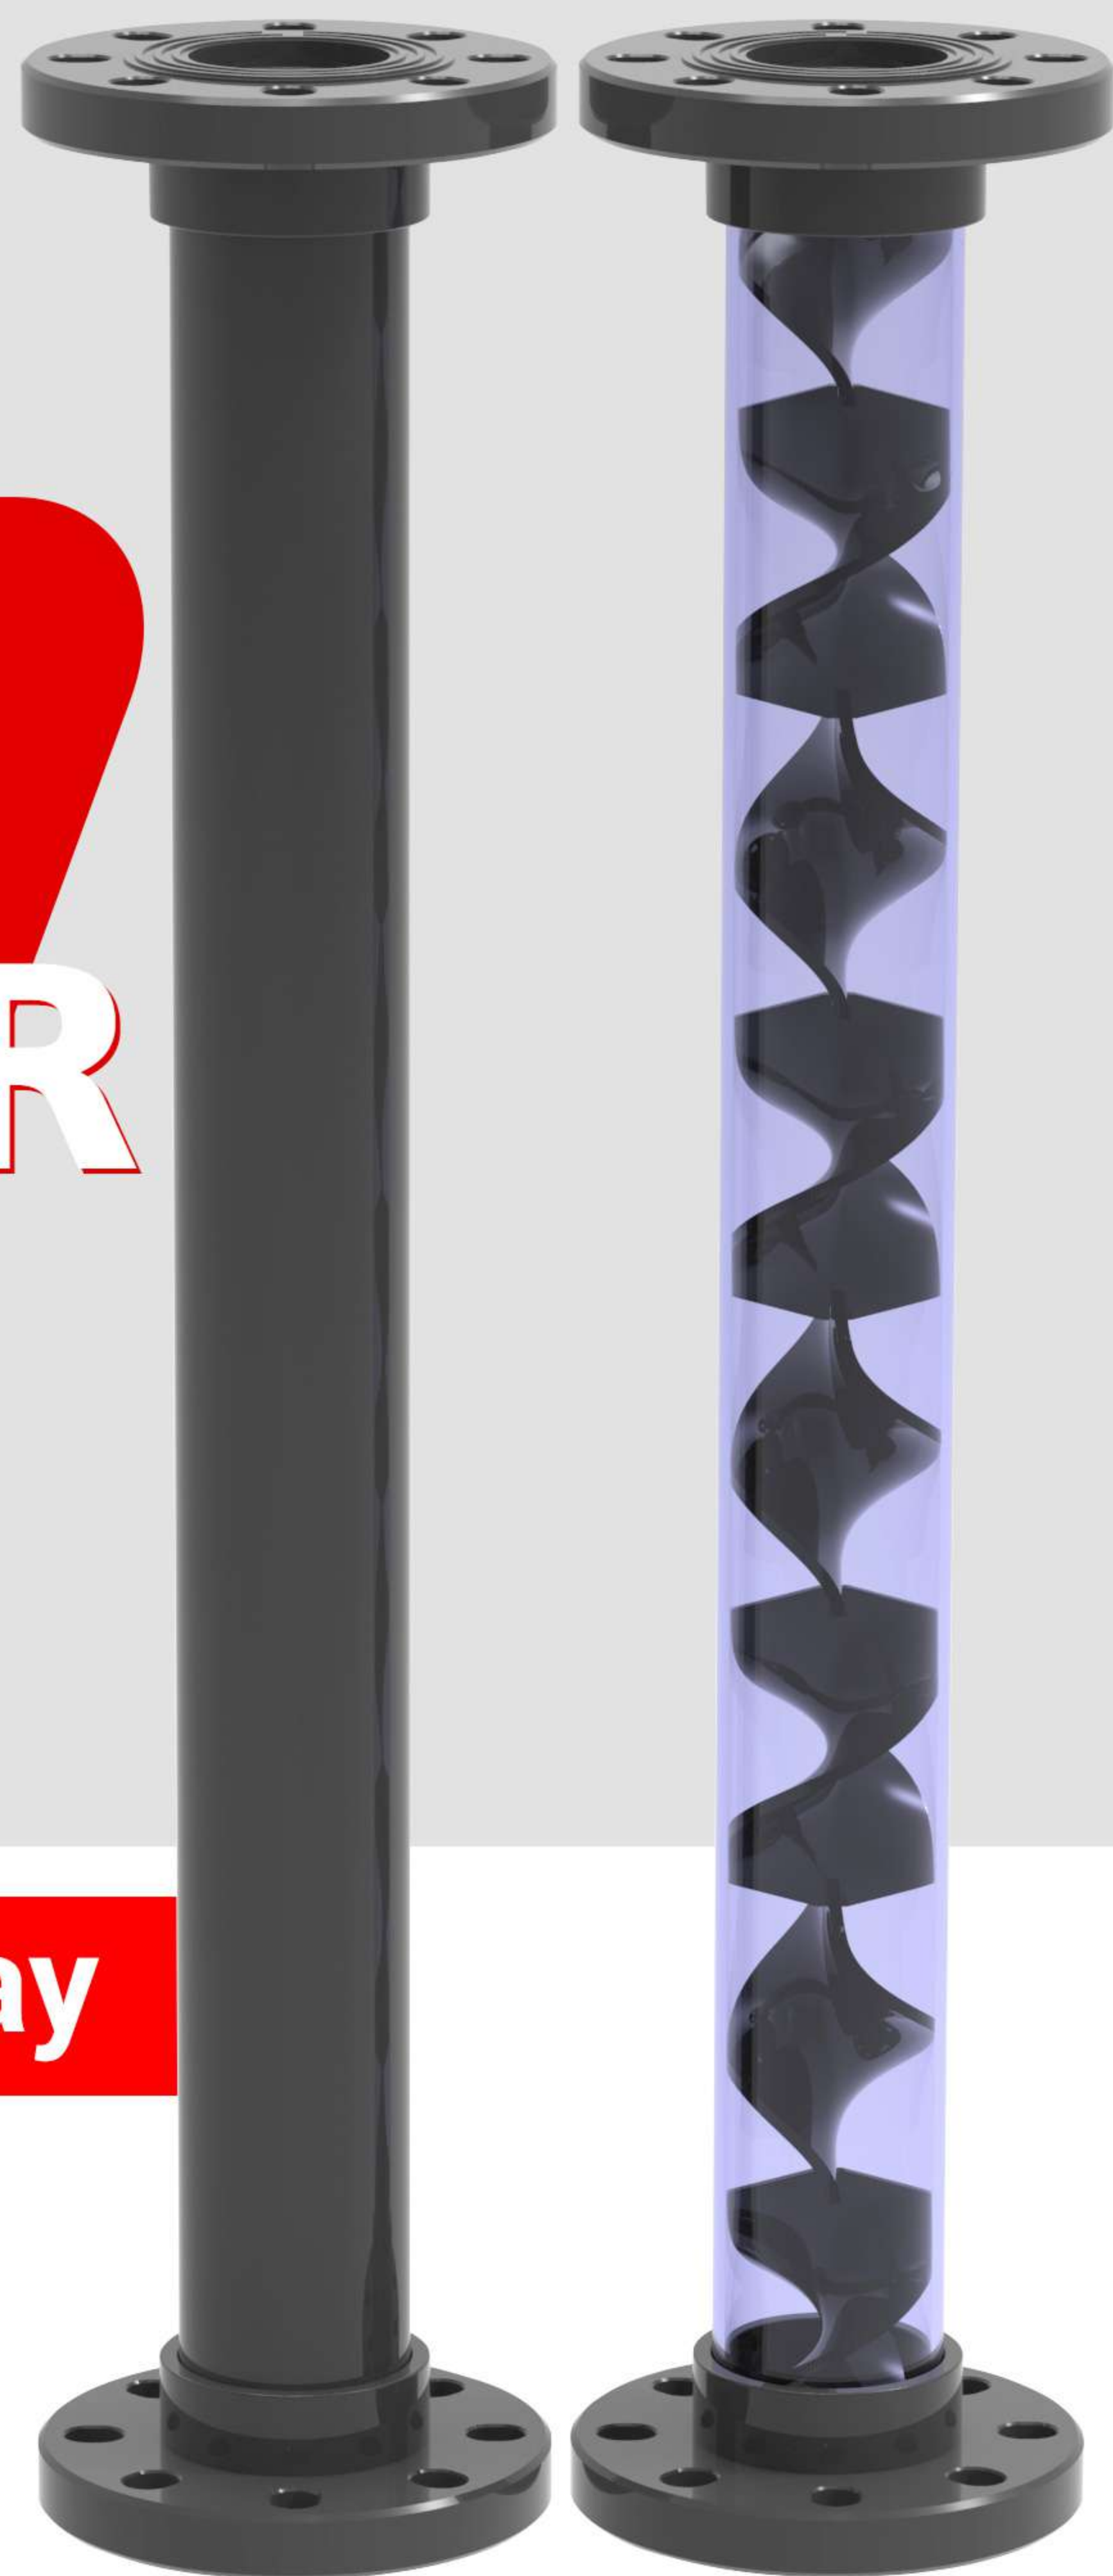

COMPUTER SIMULATED, ACHIEVING THE HIGHEST MIXTURE RATIO

- Tested under statistical simulation and adjusted accordingly to achieve the **highest performance in fluidize mixing. Applicable on liquids mixture as well as liquid and gas mixture.**

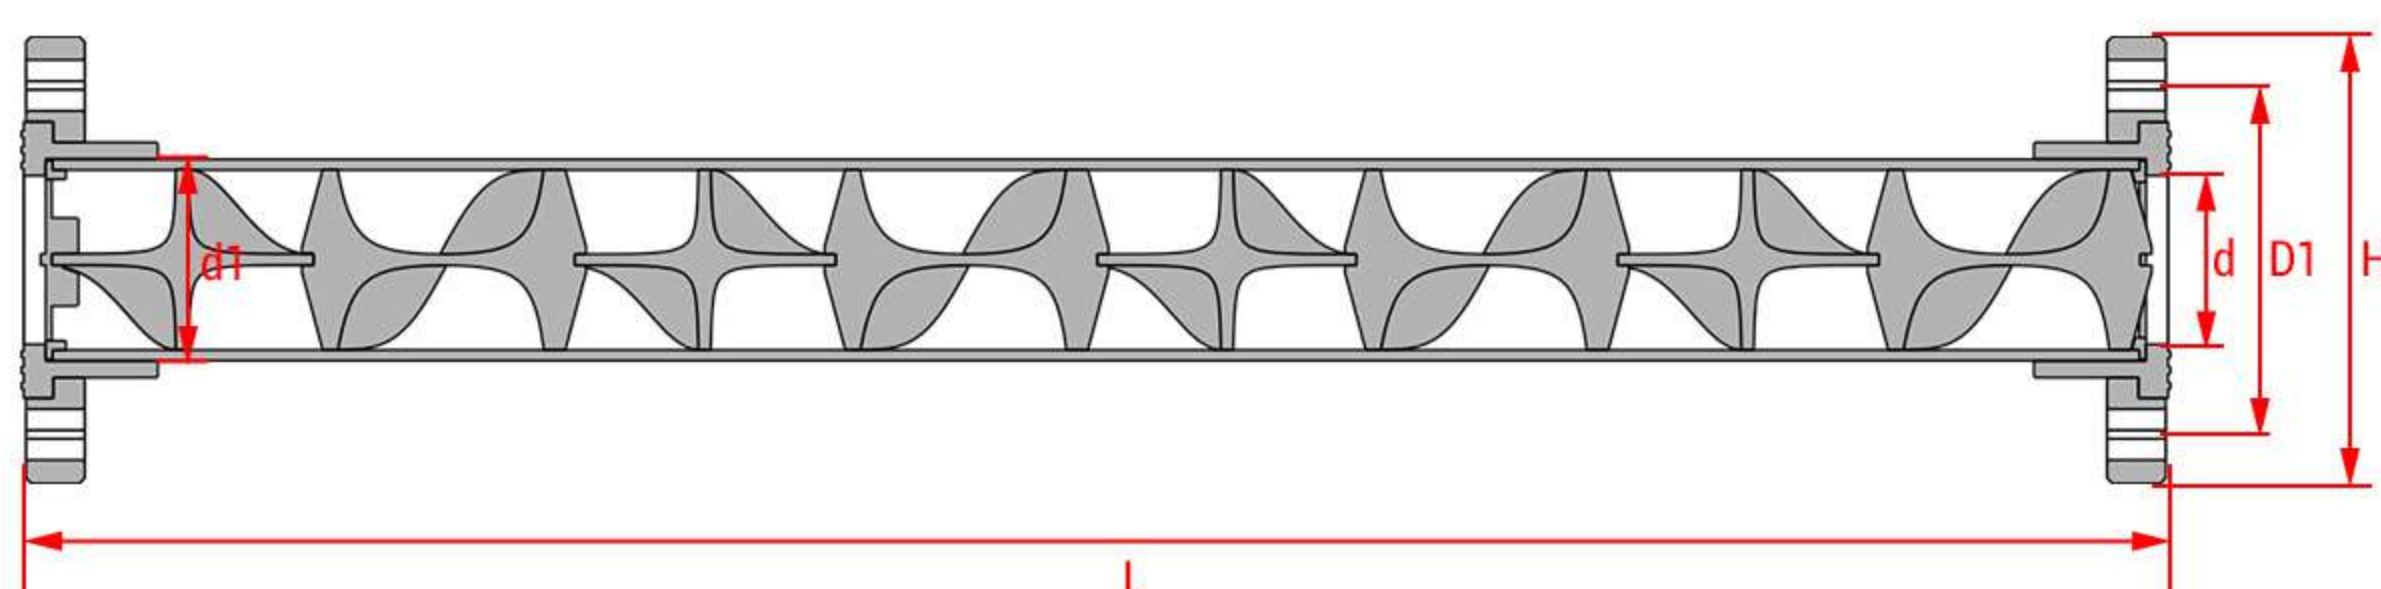

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE						FLOW RANGE	PRESSURE
DN	d1	d	D1	L	H	G(PCS)	m³/h	PN
DN65	75	67.6	145	779	185	8	10-60	10
DN80	90	75.5	160	961.4	200	8	15-80	10
DN110	110	95.2	180	1182	220	8	30-120	10

MADE USING UPVC, BROADENING APPLICATION

- Made **using UPVC**, thus allowing the product to have high corrosion resistance, **with added wall thickness it is able to achieve the pressure rating of 10kgs (150psi).**

EASY TO DISASSEMBLE AND MAINTAIN

- Designed with a modular and standardized approach, the product interfaces comply with **ISO 4219 standards**, allowing easy connection with DIN standard fittings. Each component can be replaced or adjusted, ensuring long-term stable operation.

Zaozhuang flowcolour trade Co.,Ltd

Add: Shengbei market B7-31/32, Shizhong District, Zaozhuang, Shandong China

www.flowcolour.cn

E-mail: Info@flowcolour.cn

Facebook: FlowcolourxSinking