


MALE ADAPTER

3/4"、1-1/2"



☆ SPECIFICATION

MATERIAL: UPVC
SIZE: 20mm*3/4", 32mm*3/4", 50mm*1-1/2"
STANDARD: DIN
CONNECTION: SPIGOT

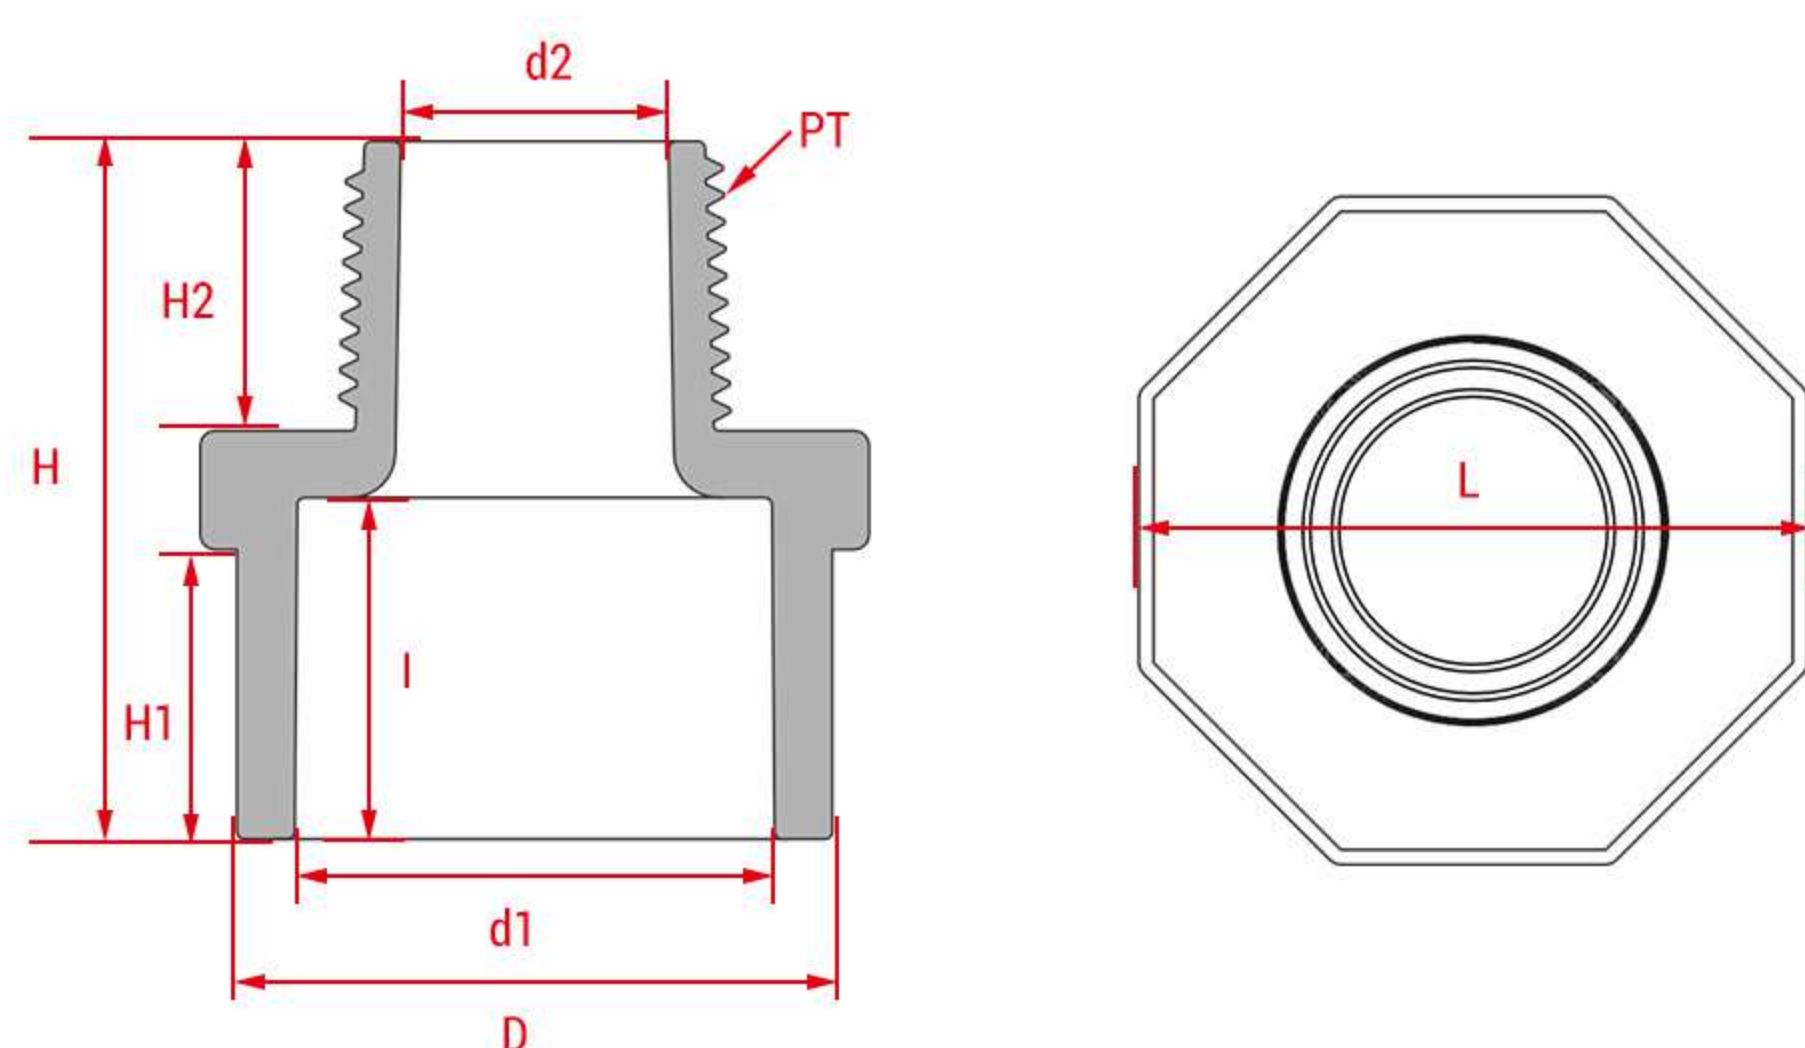

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE									PRESSURE
DN	d1	D	d2	I	L	H	H1	H2	PT	PN
20mm*3/4"	20	25	18	16.5	30	46.5	19	19.5	3/4"	16
32mm*3/4"	32	40	18	22.5	45	47	19.5	19.5	3/4"	16
50mm*1-1/2"	50	63	37.2	32.5	64	63	29	24	1-1/2"	16

STANDARDS THAT MEET INDUSTRIAL GRADE REQUIREMENTS

- The external teeth are **PT thread**, tooth gauge standard, **in accordance with the ISO7-1 specification**. The wall thickness is thickened, and the socket size conforms to the **ISO15439:2003 and GB/T4219.2 specifications**, facilitating connection with conventional pipes. **It meets the pressure standard of 16 kg.**

DIVERSIFIED CONNECTION METHODS

- In order to meet the needs of **different diameter connections**, it can be inserted into the pipe fittings by using the outer diameter, and it can also be inserted into the pipe, so as to facilitate the use of different needs.

STRICT QUALITY MANAGEMENT SYSTEM

- Strict adherence to the **ISO 9001:2015** quality management system, effectively controlling the production process of the product to ensure consistent quality. Following the Flowcolour® philosophy of "**FLOW CREATES VALUE**", This enables our products to have excellent cost-effectiveness.