


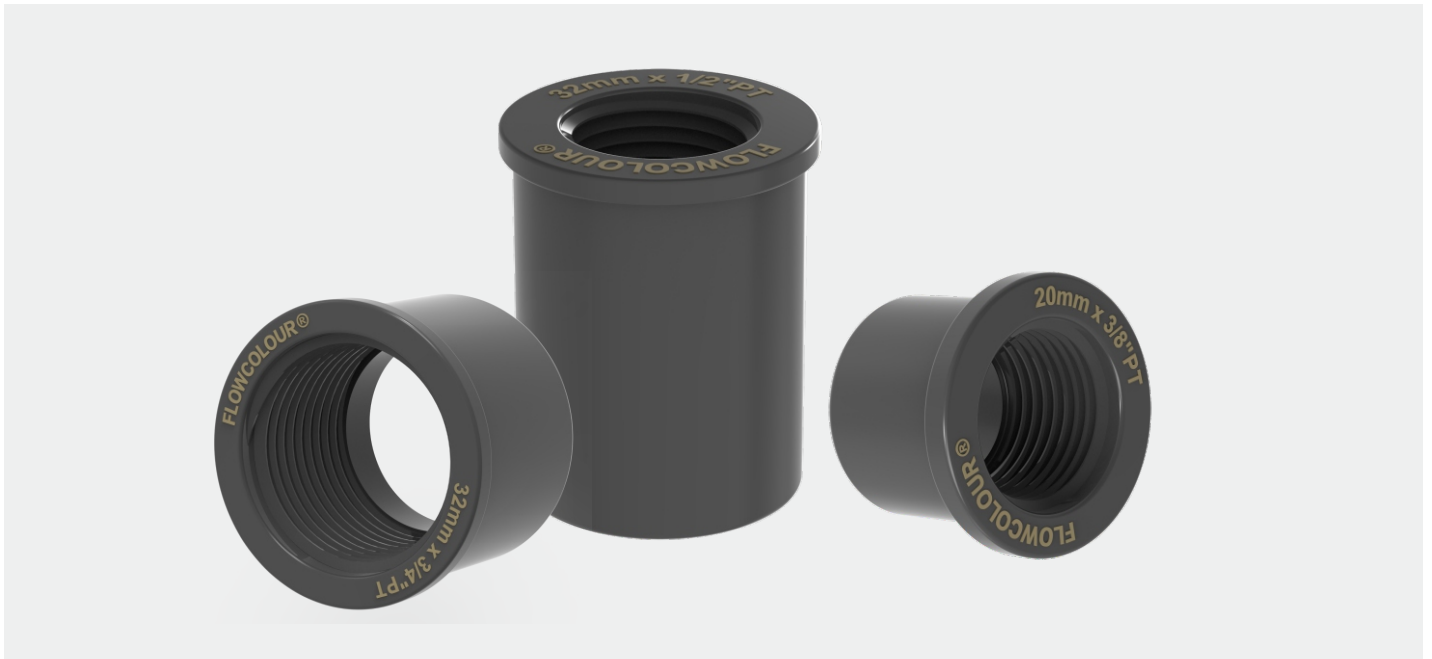

FEMALE REDUCER BUSHING


SIZE: DN10~DN25, 1/4"~ 3/4", 16A~25A

CONNECTION: Socket, Female Thread

MATERIAL: UPVC

STANDARD: DIN, ANSI, JIS

COLOUR: Gray

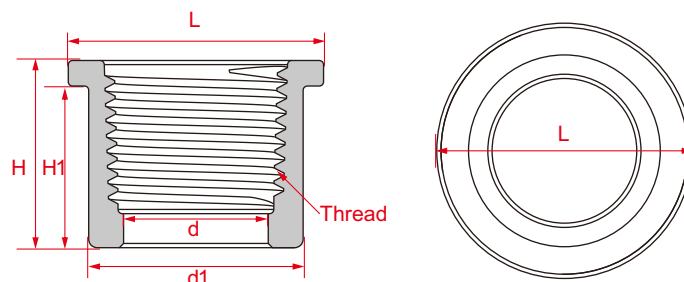

Unit:mm

NOMINAL SIZE	STRUCTURE SIZE						PRESSURE	APPROX. WT.	PRODUCT CODE
	d1	d	L	H	H1	Thread	PN	g	
20mm*1/4"	20	10	25	19	16	1/4"PT	16		225UD16G-25/8P
20mm*3/8"	20	13	25	19	16	3/8"PT	16	4.7	225UD16G-25/10P
25mm*1/2"	25	17	30	22	19	1/2"PT	16		225UD16G-25/20P
25mm*3/8"	25	13	30	22	19	3/8"PT	16	11.6	225UD16G-25/10P
32mm*1/2"	32	17	35	25.5	22.5	1/2"PT	16	21.1	225UD16G-32/20P
32mm*3/4"	32	23.8	35	25.5	22.5	3/4"PT	16	13.2	225UD16G-32/25P
32mm*3/4"	32	23.8	35	25.5	22.5	3/4"NPT	16	13.2	225UA80G-32/25N
16A*1/4"	22	10	25	33	30	1/4"PT	16	16	225UJ16G-16A/8P
20A*1/2"	26	17	30	38	35	1/2"PT	16		225UJ16G-20A/20P
20A*3/8"	26	13	30	25	22	3/8"PT	16		225UJ16G-20A/10P
20A*1/4"	26	10	30	38	35	1/4"PT	16	22	225UJ16G-20A/8P
25A*1/2"	32	17	35	43	40	1/2"PT	16	31	225UJ16G-25A/20P
25A*1/4"	32	10	35	43	40	1/4"PT	16	38	225UJ16G-25A/8P