

WATER OUTLET CONNECTOR

Triple-Threaded Screw Fast Connection



► SPECIFICATION

Material: UPVC
Size: DN15~DN25、1/2"~1"
Standard: DIN、ANSI
Connection: SOCKET、THREAD

QUICK-THREAD, EASY TO DISASSEMBLE

- Utilizing special triple-threaded screws, it enables quick connection to specially designed outlet fittings, facilitating easy assembly and disassembly.

LARGE CLAMPING RANGE


- Extended external thread length allows easy use with glass thicknesses ranging from 2mm to 20mm.

NEAT AND AESTHETIC APPEARANCE

- Featuring a curved edge design, it discreetly conceals parts inside the aquarium, enhancing the overall aesthetic appeal of the tank.

STRICT QUALITY MANAGEMENT SYSTEM

- Adheres strictly to the ISO 9001:2015 quality management system, ensuring effective control over the production process to maintain consistent product quality. Following the Flowcolour® philosophy of "FLOW CREATES VALUE" ensuring excellent cost-effectiveness of the products.

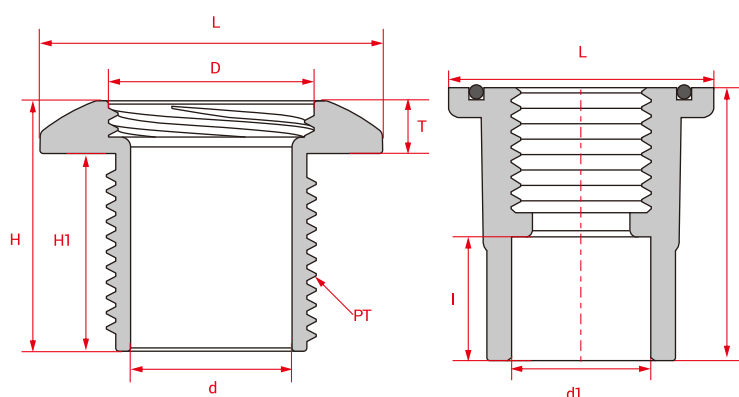

Unit: mm

NOMINAL SIZE		d1		STRUCTURE SIZE									PRESSURE	HOLE SIZE	CLAMPING THICKNESS
DN	ANSI	DIN	ANSI	d	D	I	L	H	H1	H2	T	PT	PN		
DN15	1/2"	20	21.34	14	18	18.8	38	27.5	20	43	7.5	1/2"	10	20-23	0-12
DN20	3/4"	25	26.67	18.5	24	19.9	45	37.9	30	52	7.9	3/4"	10	25-28	5-22
DN25	1"	32	33.4	24.5	31.2	19.2	52	38	30	53	8	1"	10	32-35	2-22