

ANGLE VALVE


1/2"、3/4" THREAD

**Right-angle Installation
For Precise Adjustment.**



► SPECIFICATION

MATERIAL: UPVC
SIZE: 1/2"、3/4"
STANDARD: DIN
CONNECTION: THREAD

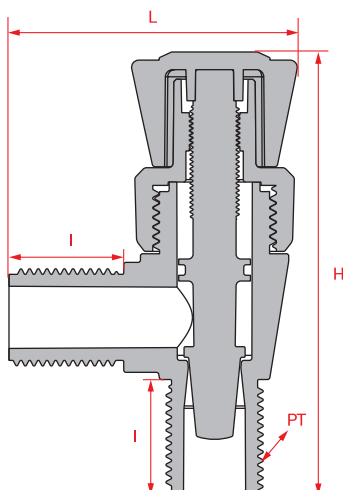

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE				PRESSURE
DN	I	L	H	PT	PN
1/2"	24	60.4	92.5	1/2"	10
3/4"	24	64.8	107	3/4"	10

SUPERIOR FLOW CONTROL CAPABILITY

- Utilizes a **valve core lifting mechanism** to adjust the bore, providing **more precise flow regulation**. Its adjustment performance is comprehensively superior to that of ordinary ball valves.

COMPACT SIZE, SPACE-SAVING

- Features a **dual-end external thread design** with a **90-degree installation angle**, allowing it to be installed in confined spaces, saving space, and meeting the needs of various scenarios.

PN16 PRESSURE RATING COMPLIANT

- Thickened body construction**, compliant with **PN16 pressure rating**. Suitable for various applications including chemical industry, agricultural irrigation, water treatment dosing, and domestic water supply.

INDUSTRIAL GRADE FORMULATION

- Product Vicat Value ≥ 74** , ensuring corrosion resistance and safety under typical operating conditions. **Includes UV-resistant additives** to extend outdoor product lifespan.

STRICT QUALITY MANAGEMENT SYSTEM

- Adheres strictly to the **ISO 9001:2015** quality management system, ensuring effective control over the production process to maintain consistent product quality. Following the **Flowcolour®** philosophy of **"FLOW CREATES VALUE"** ensuring excellent cost-effectiveness of the products.