




3-WAY ELBOW

Three-way Connection Solution

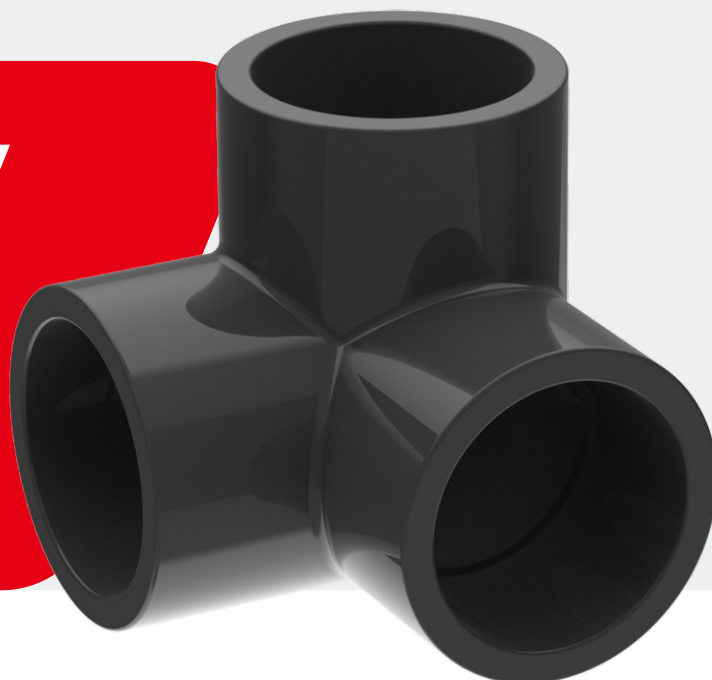

► SPECIFICATION

Material: UPVC
Size: DN15~DN25
Standard: DIN
Connection: SOCKET

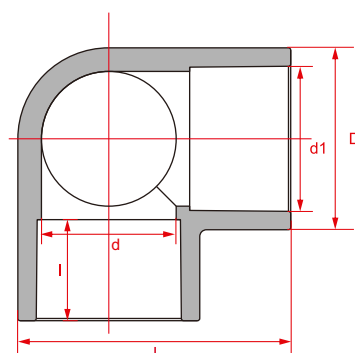

STANDARDS THAT MEET THE REQUIREMENTS OF INDUSTRIAL GRADE

- According to standards **EN ISO 15493** and comply with **PN16 pressure** requirement.

PRODUCT WITH INSTALLATION AUXILIARY LINE SYSTEM

- The product is **equipped with an installation auxiliary line system**, which facilitates the alignment and installation of 45°, 90°, 135° and other angles.

HIGHLIGHTING POLISHING

- The polishing with high finish can make the surface as smooth as the inner cavity and reduce the deposition of chemical substances.

PROVIDES VARIOUS CONNECTION POSSIBILITIES

- For compact equipment, a three-dimensional three-way connection method is provided to minimize the installation size of the equipment and provide solutions for compact industrial equipment.

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE					PRESSURE
DN	d1	D	d	l	L	PN
DN15	20	27	19	16.5	42	16
DN20	25	33	24	19	50.5	16
DN25	32	40.5	30	22.5	60.75	16