



5-WAY CROSS

**Make Traffic
Distribution More Even**

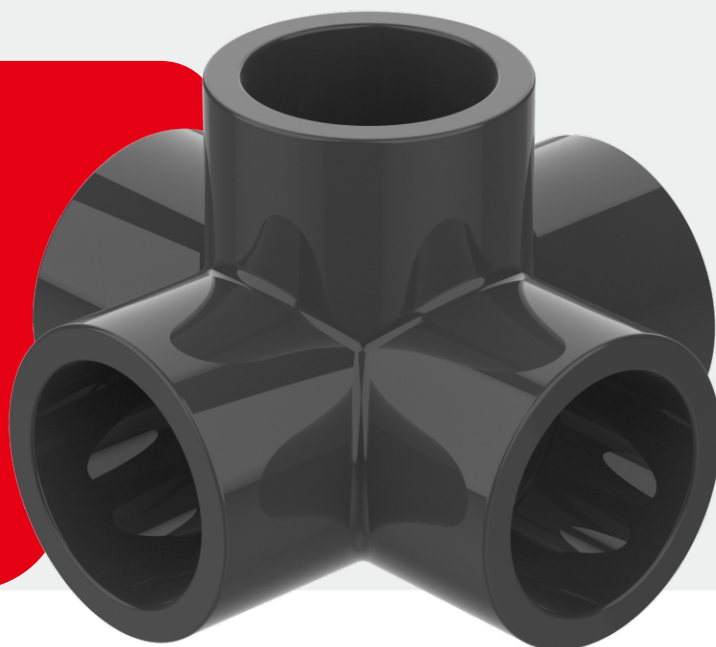

► SPECIFICATION

Material: UPVC
Size: DN15~DN25
Standard: DIN
Connection: SOCKET

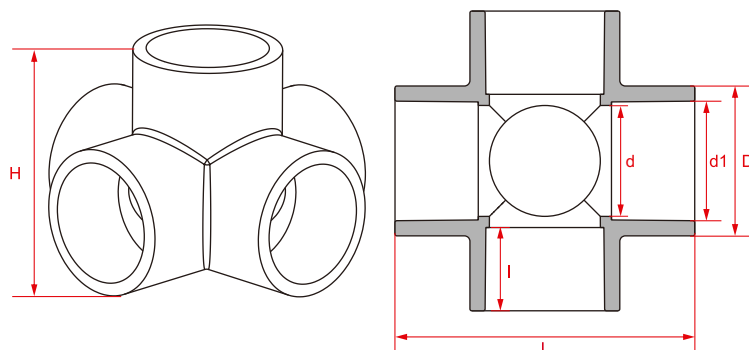

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE						PRESSURE
DN	d1	D	d	I	L	H	PN
DN15	20	27	19	16.5	57	42	16
DN20	25	33	24	19	68	50.5	16
DN25	32	40.5	30	22.5	81	60.75	16

STANDARDS THAT MEET THE REQUIREMENTS OF INDUSTRIAL GRADE

- According to standards **EN ISO 15493** and comply with **PN16 pressure** requirement.

PRODUCT WITH INSTALLATION AUXILIARY LINE SYSTEM

- The product is **equipped with an installation auxiliary line system**, which facilitates the alignment and installation of 45°, 90°, 135° and other angles.

HIGHLIGHTING POLISHING

- The polishing with high finish can make the surface as smooth as the inner cavity and reduce the deposition of chemical substances.

PROVIDES VARIOUS CONNECTION POSSIBILITIES

- It **provides five-way access**, suitable for pipeline installation in multi-way confluence and multi-way branching scenarios, and can provide an efficient and stable solution for compact equipment.