


Single Spigot Elbow

Reduce the Connection Size Between Pipe Fittings



► SPECIFICATION

Material: UPVC
Size: DN15~DN25
Standard: DIN
Connection: SOCKET*SPIGOT

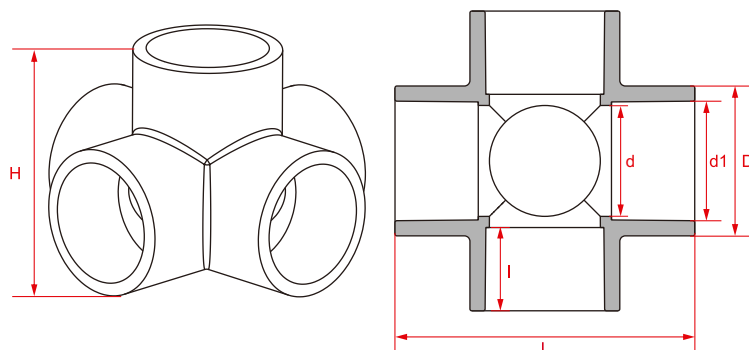

STANDARDS THAT MEET THE REQUIREMENTS OF INDUSTRIAL GRADE

- According to standards **EN ISO 15493** and comply with **PN16 pressure** requirement.

PRODUCT WITH INSTALLATION AUXILIARY LINE SYSTEM

- The product is **equipped with an installation auxiliary line system**, which facilitates the alignment and installation of 45°, 90°, 135° and other angles.

HIGHLIGHTING POLISHING

- The polishing with high finish can make the surface as smooth as the inner cavity and reduce the deposition of chemical substances.

PROVIDES VARIOUS CONNECTION POSSIBILITIES FOR COMPACT DEVICES

- It can significantly **reduce the connection size between pipes and pipes**, solve the problem of compact equipment installation space, reduce the number of bonding, and improve construction efficiency and equipment stability.

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE						PRESSURE
DN	d1	D	d	I	L	H	PN
DN15	20	27	19	16.5	57	42	16
DN20	25	33	24	19	68	50.5	16
DN25	32	40.5	30	22.5	81	60.75	16