



Single Spigot Tee

**Space Saving and
Efficient Installation**

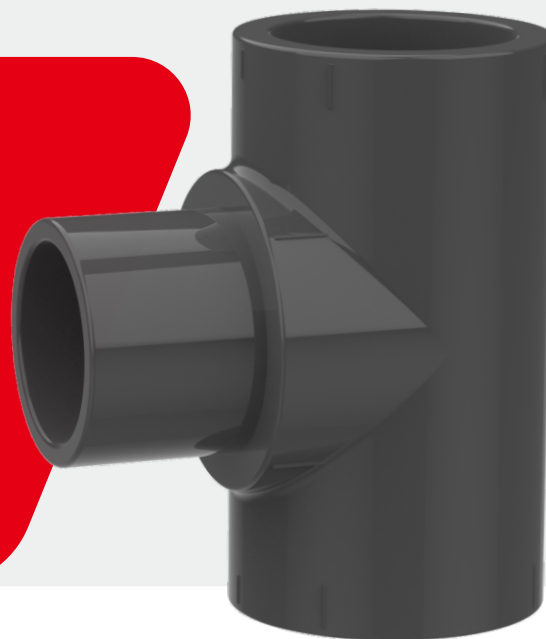

► SPECIFICATION

Material: UPVC
Size: DN15~DN40
Standard: DIN
Connection: SOCKET*SPIGOT

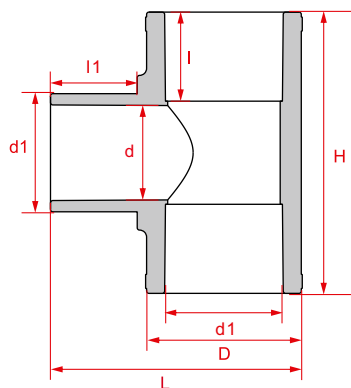

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE							PRESSURE
DN	d1	D	d	I	l1	L	H	PN
DN15	20	27	15.4	16.5	16	44.5	50	16
DN20	25	33	20.4	19	18.5	53.5	60	16
DN25	32	40.5	26.4	22.5	22	64.5	73	16
DN32	40	49	34	26.5	26	79	89	16
DN40	50	61	42.8	31.5	31	95.5	108	16

STANDARDS THAT MEET THE REQUIREMENTS OF INDUSTRIAL GRADE

- According to standards **EN ISO 15493** and comply with **PN16** pressure requirement.

PRODUCT WITH INSTALLATION AUXILIARY LINE SYSTEM

- The product is **equipped with an installation auxiliary line system**, which facilitates the alignment and installation of 45°, 90°, 135° and other angles.

HIGHLIGHTING POLISHING

- The **polishing with high finish** can make the surface as smooth as the inner cavity and **reduce the deposition of chemical substances**.

PROVIDES VARIOUS CONNECTION POSSIBILITIES FOR COMPACT DEVICES

- It can significantly **reduce the connection size between pipes and pipes**, solve the problem of compact equipment installation space, reduce the number of bonding, and improve construction efficiency and equipment stability.