


QUICK ELBOW BULKHEAD

**Convenient Connection
Dedicated for Aquarium**



►► SPECIFICATION

Material: UPVC
Size: DN15~DN32
Standard: DIN
Connection: SOCKET

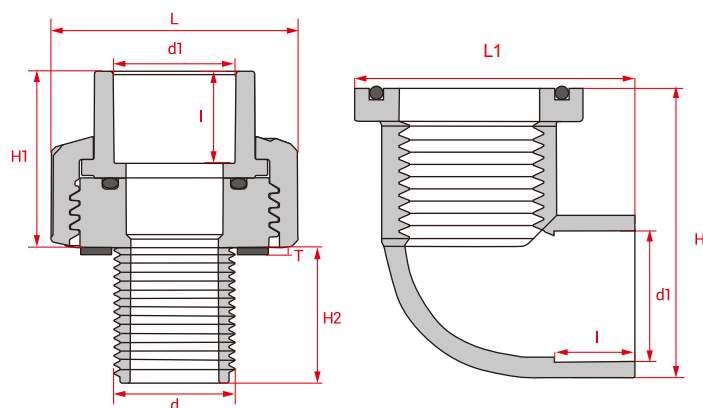

SPACE-SAVING AND EASY INSTALLATION

- This product adopts a **modular design concept**, combining the quick-disconnect convenience of union nuts with the installation characteristics of elbow inlet/outlet fittings. It significantly **saves installation space** and facilitates the disassembly and assembly of aquarium and water tank accessories. Installation is convenient and operation is simple.

INDUSTRIAL-GRADE FORMULA, RELIABLE MATERIAL

- The product's **Vicat value is $\geq 74^{\circ}\text{C}$** , ensuring corrosion resistance and safety under standard operating conditions. **The formula includes UV-resistant components**, extending the product's outdoor lifespan. Additionally, the formula has excellent biosecurity, meeting national water safety certification requirements.

WIDER APPLICABILITY

- Extra-long external thread**, with a through-panel thickness capability of up to 24mm. **Suitable for use in thickened tanks and vessels.**

Unit: mm

NOMINAL SIZE	STRUCTURE SIZE									PRESSURE	HOLE SIZE	CLAMPING THICKNESS
DN	d1	d	I	L	L1	H	H1	H2	T	PN		
DN15	20	1/2"	16.5	44.5	49	38	31.8	23	2	10	20-23	5-15
DN20	25	3/4"	19	51	56	60	36.4	35	2	10	25-28	5-25
DN25	32	1"	22.5	59	66	70	40.3	40	2	10	32-35	5-25
DN32	40	1-1/4"	26.5	73	78.9	75	47	40	2	10	40-43	8-24